


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner not previously established.

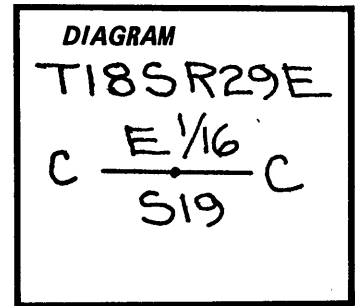

P-4
F.B.4 Pg. 17

Description of corner evidence found:

None.

Description of monument and accessories I established to perpetuate the original location of this corner:

At calculated position set by survey swing tie set a 2 1/2 inch O.D. 30 inch long aluminum pipe 24 inches in ground to bedrock with 3 1/4 inch aluminum cap marked as shown:


Marked new bearing trees:

a 10" Ponderosa Pine bears North 75°00' East, 38.3 ft., scribed-CE1/16S19BT;
a 9" Ponderosa Pine bears South 13°15' West, 11.3 ft., scribed-CE1/16S19BT.

Raised a stone and earth mound 2 foot diameter to cap. Painted red band and face red and nailed signs 54-3 and 54-9 on bearing trees. Set steel post 6 feet North with sign 54-9 facing corner. Nailed brass washer stamped "AS&E LS1026" to face of new bearing trees.

I hereby certify the above corner monument was established as herein described on May 23, 1985.

Witnesses: David B. Armstrong
Andy Dodson



M.V.18°30'E.

Office of.....*Surveyor*..... County of.....*Grant*.....
State of.....*Oregon*....., I hereby certify that the within instrument was filed in this office
for record on the.....*15* day of.....*July*....., 19.....*85*
.....*Robert D. Smith*..... by.....
(COUNTY OFFICIAL) (DEPUTY)

