

History of original corner establishment:

Not Applicable

DIAGRAM


T18S R30E

S.26 + A.P.3
T.2

Description of corner evidence found:

Not Applicable

Description of monument and accessories established to perpetuate the original location of this corner:

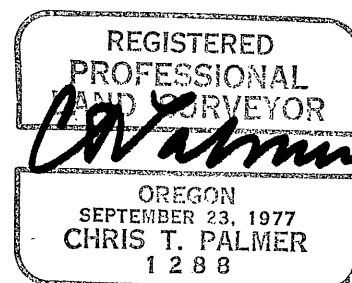

At the location of this corner we set an all aluminum monument,
2-1/2" dia. x 30" long, with a 3-1/4" dia. cap stamped:

T18S R30E
STA 060402
S.26 + A.P.3
T.2
PLS 1288
1989

Monument is buried 22", 8" above the ground. Set Stl. fence post
with Land Survey (54-9) and Forest Boundary (54-2) signs 1 ft.
north of the corner.

Reference Points:

A 6" l.p. pine bears N.15°20'E., 82.6 ft. scribed "AP3 TR2 BT"
A 8" l.p. pine bears S.66°45'E., 58.2 ft. scribed "AP3 TR2 BT"

Witnesses: Cork Palmer
Set Dec. 5, 1989.

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 13 day of Feb, 1990
John D. Bryant by _____
(COUNTY OFFICIAL) (DEPUTY)