

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established in 1880 by Bamford Robb, under General Land Office Joint Contract No. 366.

Surveyor General's records state:

Set basalt stone 16x10x8 in mound of stone for cor. to secs 25, 26, 35 & 36 from which

A pine, 10 in. dia. bears S10°E 34 lks. dist.

A pine, 12 in dia. bears N70°W 60 lks. dist.

DIAGRAM

T18S	R30E
S26	S25
S35	S36

Note: No restoration appears in County records

Description of corner evidence found:

At assumed corner location, I found a basalt stone 16x10x8 in., projection 14 in. above ground, with very faint markings on south and east faces from which

A pine, 10 in. dia., dead and down with good scribed face, bears S10°E 34 lks. dist.

A pine, 16 in. dia., face grown over, bears N65°30'W 59.6 lks. dist.

Description of monument and accessories | established to perpetuate the original location of this corner:

As evidence in vicinity of corner agrees with GLO original record, I set at location of found 16x10x8 basalt stone, a 30 in. long 2 in. dia., galv. iron pipe in ground, in a stone mound, with a 2 in. brass cap marked:

T18S R30E

S26	S25
S35	S36

PLS 1067

1978


New bearing trees:

A p.pine, 15 in. dia., bears N35°30'E 94.5 ft. dist. scribed T18S R30E S23 BT


A fir, 8 in. dia., bears S54°30'E 22.6 ft. dist. scribed T18S R30E S36 BT

A fir, 7 in. dia., bears S56°30'W 31.8 ft. dist. scribed T18S R30E S35 BT

I buried found 16x10x8 in. basalt stone alongside iron pipe and placed brass washer marked 'LS 1067 below scribing and place USFS signs on all bearing trees. I hereby certify the above corner monument was re-established as herein described July 6, 1978.
Witness: Darryl J. Anderson

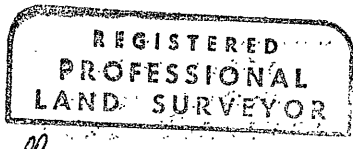

Sherman E. Anderson



State of Oregon County of Grant
I hereby certify that the within instrument was filed in this office
for record on the 21 day of Sept, 1978
Robert E. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)