


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

This 1/16 corner not previously established of record.

I established this 1/16 corner at midpoint and on the line between the Northwest corner and North 1/4 corner of the section.



Description of corner evidence found:

None



(See map of Survey, dated June, 1979.)

Description of monument and accessories I established to perpetuate the original location of this corner


At corner point I set 2 1/2" x 30" iron pipe with brass cap marked as shown, 27" in ground, from which:

A 6" L.P. Pine Bears S. 18 W., 16.1 ft. marked
W 1/16 S36 BT.

A 6" L.P. Pine Bears N. 62 W. 23.4 ft. marked
W 1/16 S25 BT.



Nailed brass washer to BT. blazes,
used steel tape and magnetic compass
with 20° declination.
Measured to center of BTs.

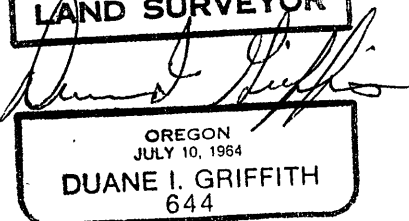

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 24 day of OCT 1979
Robert S. Bager by _____
(COUNTY OFFICIAL) (DEPUTY)