

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established in 1889 by Bamford Robb, under General Land Office Joint Contract No. 366.

Surveyor General's records state:

Set a basalt 12x10x8 in mound of stone for $\frac{1}{4}$ sec. cor. from which;

A pine, 36 in. dia. bears N85°W 8 lks. dist.

Note: No restoration appears in County records.

DIAGRAM

T18S R30E

$\frac{1}{4}$ $\frac{S25}{S36}$

Description of corner evidence found:

At assumed corner location, I found a 12x10x8 in. basalt stone, in mound of stone, no visible scirbing found, from which

A dead and down p.pine, 36 in. dia., bears N85°W 8 lks. dist. scribing visible

Description of monument and accessories I established to perpetuate the original location of this corner:

As evidence in vicinity of corner agrees with GLO original record, at the location of found 12x10x8 stone I set a 30 in. long 2 in. dia., alum. pipe in ground, in a stone mound, with a 3 in. alum. cap marked:

T18S R30E

$\frac{1}{4}$ $\frac{S25}{S26}$



PLS 1026
1978

New Bearing Trees:

A p.pine, 20 in. dia., bears N14°E 39.6 ft. dist. scribed $\frac{1}{4}$ S25 BT

A p.pine, 16 in. dia., bears S52°30'W 23.3 ft. dist. scribed $\frac{1}{4}$ S36 BT

I buried the 12x10x8 stone alongside the alum. pipe and I placed a brass washer marked LS 1067 below the scribing and USFS signs on all bearing trees. I hereby certify the above corner monument was re-established as herein described on July 6, 1978. Witness: Darryl J. Anderson

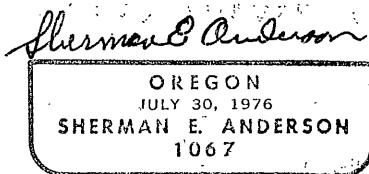

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 21 day of Sept, 1978.
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)