


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

This 1/16 corner not previously established of record.

I established this 1/16 corner at midpoint and on the line between the center 1/4 corner and South 1/4 corner of the section.

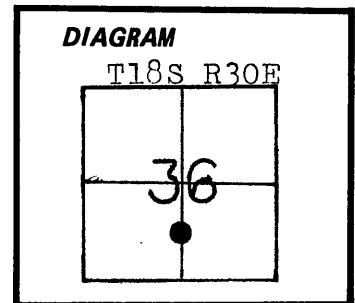

Description of corner evidence found:

None

(See map of Survey, dated June, 1979.)


Description of monument and accessories I established to perpetuate the original location of this corner:

At corner point I set 2 1/2" x 30" iron pipe with brass cap marked as shown, 21" in ground, from which:


A 7" P. Pine Bears N. 86 E., 13.1 ft. marked CS 1/16 BT.

A 9" Fir Bears S. 44 E., 26.2 ft. marked CS 1/16 BT.

Raised mound of stone.

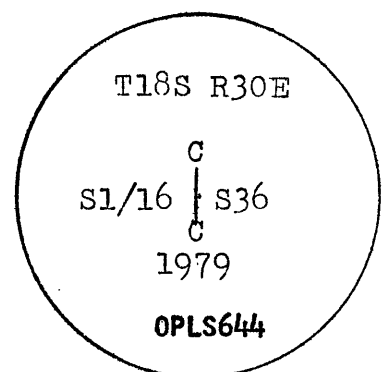

Nailed brass washer to BT. blazes, used steel tape and magnetic compass with 20° East declination. Measured to center of BTs.



Office of Surveyor County of Grant
State of Oregon I hereby certify that the within instrument was filed in this office
for record on the 24 day of Oct, 1979
Robert W. Bagat by _____
(COUNTY OFFICIAL) (DEPUTY)