

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Original section corner established by James P. Currin and W.H. Odell under joint Contract No. 348, dated January 22, 1880.

Page 89 of the Government Field Notes states:

N89°57'E on true North Boundary of Section 2.
80.00 set basalt stone 12x10x6 in stone mound
corner to sections 1,2,35 and 36.

No record of subsequent remonumentation in County records.

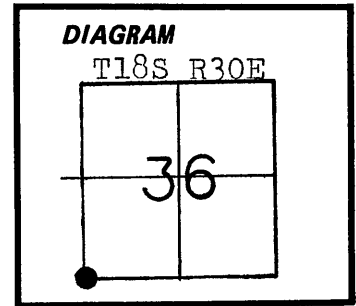

Description of corner evidence found:

None




(See map of Survey, dated June, 1979.)

Description of monument and accessories I established to perpetuate the original location of this corner:

At proportionate distance I set 2½" x 30" iron pipe with brass cap marked as shown, 28" in ground, from which:

- A 14" Pine Bears N. 1 E., 239.5 ft. marked T18S R30E S36 BT.
- A 12" Pine Bears S. 62 W., 168.7 ft. marked T19S R30E S2 BT.
- A 12" Pine Bears N. 53 W., 142.0 ft. marked T18S R30E S35 BT.

Raised mound of stone.

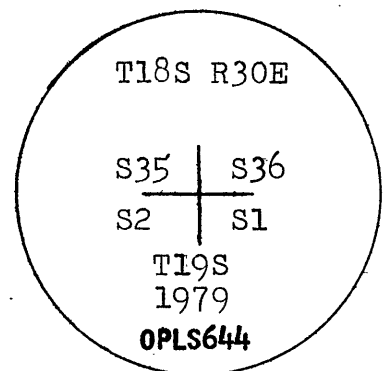

Nailed brass washer to BT. Blazes, used steel tape and magnetic compass with 200 declination. Measured to center of BTs.

Office of Surveyor County of Grant
State of Oregon hereby certify that the within instrument was filed in this office
for record on the 24 day of OCT, 1979
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)