

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Original 1/4 corner established by Reuben R. Leigh under Contract No. 462, dated April 11, 1883.

Page 182 of the Government Field Notes states:

Thence I run S 1037' E on true line between Sections 5 and 6 with same VA.
39.88 set a basalt stone 16x12x5 ins. 11 ins. in ground for 1/4 section corner.

No record of subsequent remonumentation in County records.

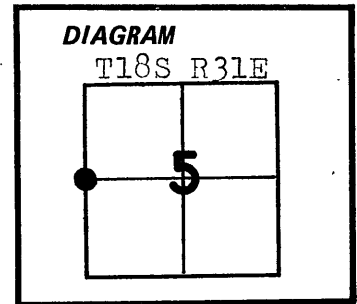

Description of corner evidence found:

None

(See map of Survey, dated September, 1979)


Description of monument and accessories established to perpetuate the original location of this corner:

At proportionate distance I set 2 1/2"x30" iron pipe with brass cap marked as shown, 28" in ground, from which:



A 18" Ponderosa Pine bears N 65 E, 7.7 ft. marked 1/4 S5 BT.

A 20" Ponderosa Pine bears N 64 W 46.4 ft. marked 1/4 S6 BT.

Raised mound of stone.

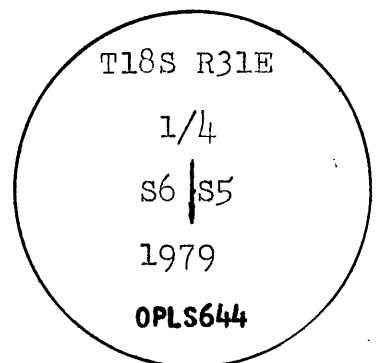

Nailed brass washer to BT blazes, used steel tape and magnetic compass with 170 East declination measured to center of BTs.

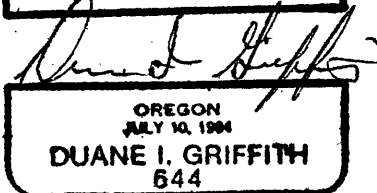

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 24 day of Oct, 1979
Robert D. Bantz by _____
(COUNTY OFFICIAL) (DEPUTY)