


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

The Center 1/4 corner not previously established of record.

I established this 1/4 corner at the intersection of lines from opposite corresponding 1/4 corners of the section.

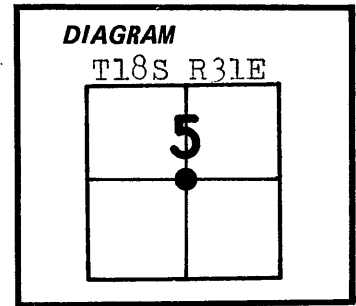

Description of corner evidence found:

None



(See map of Survey dated September, 1979)

Description of monument and accessories I established to perpetuate the original location of this corner:

At corner point I set 2 1/2"x30" iron pipe with brass cap marked as shown, 22" in ground, from which:

A rock 36"x32", 24" high, marked B.O. bears S 72 W 14.6 ft. Bearing and distance to PK nail driven in a 2" + chistled in top of rock.

Raised mound of stone 3 ft. base to top of cap.

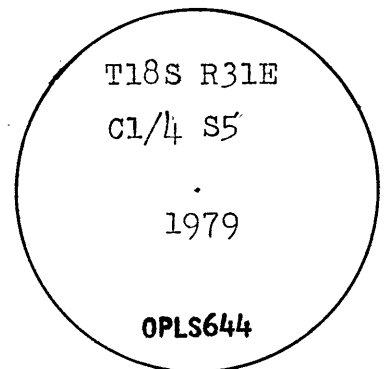

Nailed brass washer to BT blazes, used steel tape and magnetic compass with 17° East declination measured to center of BTs.

Office of Surveyor County of Grant  
State of Oregon, I hereby certify that the within instrument was filed in this office  
for record on the 24 day of Oct, 1979  
Robert D. Seibert by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)