

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original 1/4 corner established by Reuben R. Leigh under Contract No. 462, dated April 11, 1883.

Page 154 of the Government Field Notes states:


Thence I run S 1°07' E on true line between Sections 4 and 5 with same VA.

39.81 set a post 3 ft. long, 3 ins. square with marked stone 12 in. in ground for 1/4 section corner.

No record of subsequent remonumentation found in County records.

Description of corner evidence found:

None

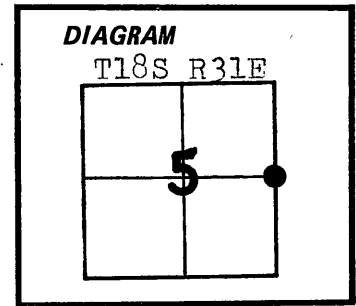


(See map of Survey dated September, 1979)

Description of monument and accessories I established to perpetuate the original location of this corner:



At proportionate distance I set 2 1/2' x 30" iron pipe with brass cap marked as shown, 29" in ground, from which:

A 13" Ponderosa Pine bears S 65 W, 103.4 ft. marked 1/4 S5 BT.

Raised mound of stone.

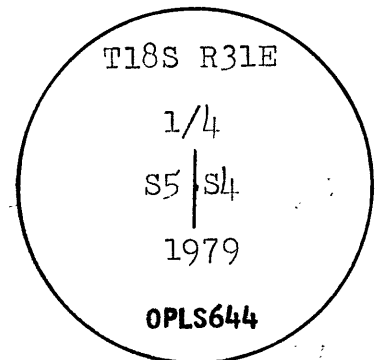

Nailed brass washer to BT blazes, used steel tape and magnetic compass with 17° East declination measured to center of BTs.

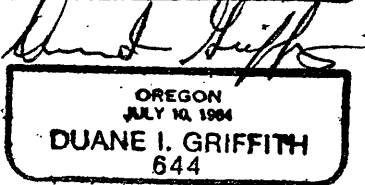

Office of Surveyor County of Grant
State of Oregon hereby certify that the within instrument was filed in this office
for record on the 24 day of Oct, 1979
Robert W. Degett by _____
(COUNTY OFFICIAL) (DEPUTY)