


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

This 1/16 corner not previously established of record.

I established this 1/16 corner at midpoint and on the line between the Center 1/4 corner and the S 1/4 corner of the section.

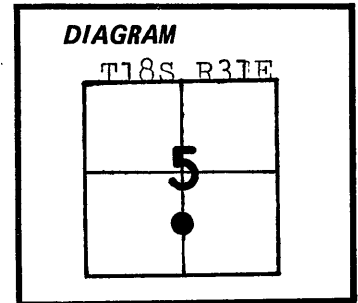

Description of corner evidence found:

None




(See map of Survey dated September, 1979)

Description of monument and accessories I established to perpetuate the original location of this corner:

At corner point I set 2 1/2"x30" iron pipe with brass cap marked as shown, 27" in ground.

No trees or suitable bearing objects available, I raised mound of stone 3 ft. at base, 18" high.

Steel fence post 10± ft. west.

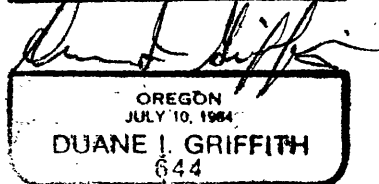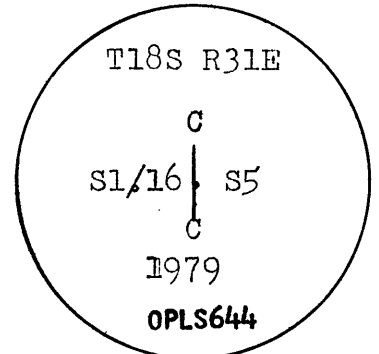

Nailed brass washer to BT blazes, used steel tape and magnetic compass with 17° East declination measured to center of BTs.

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 24 day of Oct, 1979
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)