


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original survey by A.C. Eckelson under Contract Number 328, dated June 17, 1879.

80.00 Set stone 12x10x8 for corner to secs. 6,7,1, & 12, from which
A Pine 16" diam. bears N.40°E., 42 lks. dist.
A Pine 24" " " N.75°W., 27 lks. dist.

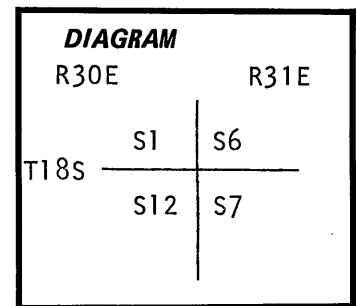

Description of corner evidence found:

Found stone 12"x9"x4", 4" in ground in mound of stones with 5 notches on S. face and 1 notch on N. face.

Found 28" PP scribed S1 T18 R30 bearing N.75°W., 27 lks. dist.

Found down remnants of PP scribed 6, 18, 31 bearing N.40°E., 42 lks. dist.

Description of monument and accessories I established to perpetuate the original location of this corner:


At the position of the above described stone I set a 30" long 2½" dia. iron pipe with brass cap, marked as shown below, buried 24" in ground with stones piled around the pipe to the top of the cap. I turned the original stone upside down and buried it flush with the ground on the N. side of the new mounument
from which I scribe NEW BEARING TREES:

A Ponderosa Pine 7" diam. bears S.38°E., 24.8 ft., mkd. T18S R31E S7 BT.
A Douglas Fir 12" diam. bears S.61°W., 16.7 ft., mkd. T18S R30E S12 BT.
A " " 7" " " N.76°E., 11.4 ft., mkd. T18S R31E S6 BT.

Used steel tape and magnetic compass with 20° East variation, measuring to the center of the New BTs.

This corner was set July 27, 1979.

Witnesses: F.R. Palmer, L.R. Nevill and S. Anderson



Office of _____ County Surveyor _____ Grant
State of _____ Oregon _____, I hereby certify that the within instrument was filed in this office
for record on the 23 day of Aug, 1979.
Robert D. Dyer by _____
(COUNTY OFFICIAL) (DEPUTY)

