


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established in 1883 by Reuben R. Leigh, under General Land Office Contract No. 462.

Surveyor General's records state:

Set a basalt stone 14x12x10 ins. 10 ins. in ground for cor to sec 4,5,8 & 9 marked with 5 notches on S and 4 notches on E edge and raised a mound of stone 2 ft. high 4.5 ft. base alongside.

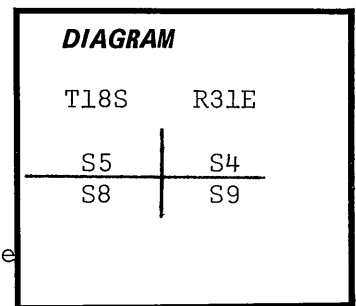


Note: No restoration appears in County records.

Description of corner evidence found:



At assumed corner location, I found 14x12x10 in. basalt stone projecting 12 ins. with 5 notches on S face and 4 nothces on E face, set in a mound of stone.

Description of monument and accessories I established to perpetuate the original location of this corner:

As evidence in vicinity of corner agrees with GLO original record, at the location of the found 14x12x10 in. basalt stone, I set a 30 in. long 2 in. dia., galv. iron pipe in ground, in a mound of stone, with a 2 in. brass cap marked



I hereby certify the above corner monument was re-established as herein described on July 6, 1978. Witnesses: Carl E. Sundet
Terry Butler

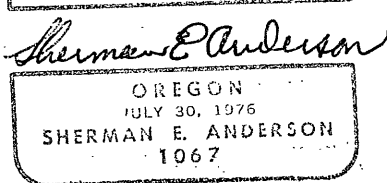

Office of Surveyor County of Grant
 State of Oregon, I hereby certify that the within instrument was filed in this office
 for record on the 21 day of Sept, 1978
Robert R. D. Babin by _____
 (COUNTY OFFICIAL) (DEPUTY)