

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Original 1/4 corner established by Reuben R. Leigh
under Contract No. 462, dated April 11, 1883.

Page 177 of the Government Field Notes states:

North between Sections 7 and 8
40.00 set a post 3 ft. long, 3 ins. square with
a marked stone 2 ins. in ground for 1/4 section corner.

No record of subsequent remonumentation in County records.

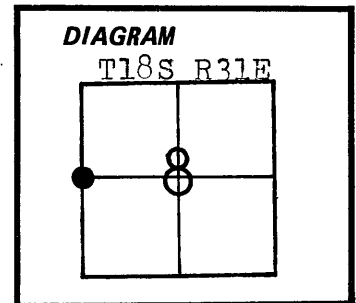

Description of corner evidence found:

None


(See map of Survey dated September, 1979)

Description of monument and accessories established to perpetuate the
original location of this corner:

At proportionate distance I set 2 1/2"x30" iron pipe
with brass cap marked as shown, 28" in ground,
from which:

A 13" Ponderosa Pine bears S 8 E, 33.7 ft., marked
1/4 S8 BT.

A 16" Ponderosa Pine bears S 66 W, 55.7 ft., marked
1/4 S7 BT.

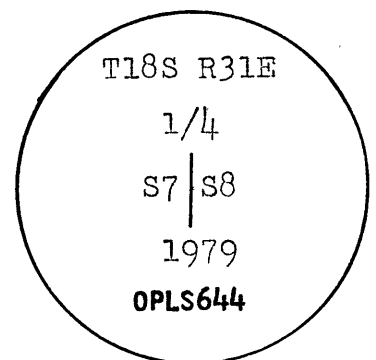

Nailed brass washer to BT blazes,
used steel tape and magnetic compass
with 17° East declination measured
to center of BTs.

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 31 day of October, 1979.
Robert D. Griffith by _____
(COUNTY OFFICIAL) (DEPUTY)