

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Original 1/4 corner established by Reuben R. Leigh under Contract No. 462, dated April 11, 1883.

Page 171 of the Government Field Notes state:

North between Sections 17 & 18.
40.00 set a basalt stone 14x10x6 ins., 10 ins. in ground for 1/4 section corner.

No record of subsequent remonumentation in County records.

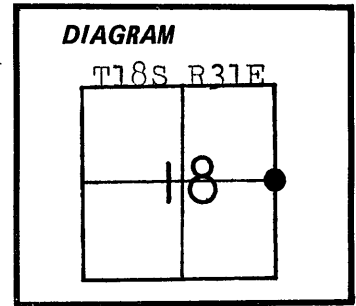

Description of corner evidence found:

None

(See map of Survey dated September, 1979)


Description of monument and accessories I established to perpetuate the original location of this corner:

At proportionate distance I set 2 1/2"x30" iron pipe with brass cap marked as shown, 28" in ground, from which:

A 12" Ponderosa Pine bears S 29 E, 37.4 ft., marked 1/4 S17 BT.

A 11" Ponderosa Pine bears S 35 W, 50.6 ft., marked 1/4 S18 BT.

Raised mound of stone.

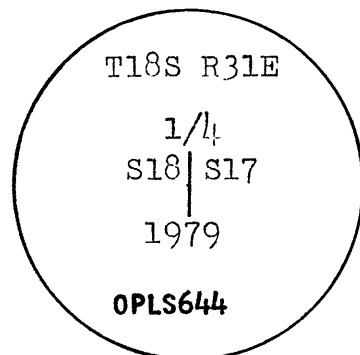

Nailed brass washer to BT blazes, used steel tape and magnetic compass with 17° East declination measured to center of BTs.

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office for record on the 24 day of October, 1979
Robert D. Seay by _____
(COUNTY OFFICIAL) (DEPUTY)