

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established in 1883 by Reuben R. Leigh, under General Land Office Contract No. 462.

Surveyor General's records state:

Set a post for $\frac{1}{4}$ sec. cor. 3 ft. long 3 in. square marked $\frac{1}{4}$ S on N face from which;

A pine, 14 in. dia. bears S83°E 44 lks. dist. marked $\frac{1}{4}$ S BT

A pine, 16 in. dia. bears N20°W 118 lks. dist. marked $\frac{1}{4}$ S BT

Note: No restoration appears in County records.

DIAGRAM

T18S R31E

$\frac{S17}{S20}$ $\frac{1}{4}$

Description of corner evidence found:

At assumed corner location, I found

A p.pine, 24 in. dia., live and healed over, bearing S79°30'E 99 lks. dist.

A p.pine, 26 in. dia., live and healed over, bearing N20°W 118 lks. dist.



Description of monument and accessories I established to perpetuate the original location of this corner:

As evidence in vicinity of corner agrees with GLO original record, at the location of record call and distance from original bearing tree, I set a 30 in. long 2 in. dia. galv. iron pipe in ground, in a small mound of stone with a brass cap marked:

T18 R31E
 $\frac{1}{4}$ $\frac{S17}{S20}$
RLS 1067
1978

I placed USFS signs on all BT's. I hereby certify the above corner monument was re-established as herein described on July 6, 1978. Witnesses: Carl D. Sundet

Terry Butler
Assistants

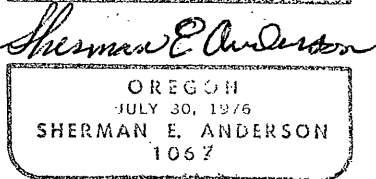

Office of.....*Surveyor*..... County of.....*Grant*.....
State of.....*Oregon*....., I hereby certify that the within instrument was filed in this office
for record on the.....*21*..... day of.....*Sept*....., 19.....*78*.....
.....*Robert D. Beget*..... by.....
(COUNTY OFFICIAL) (DEPUTY)