


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

The NW 1/16 Corner of Section 20 not previously established of record.

I established this 1/16 corner at the intersection of lines from opposite corresponding 1/16 corners of the NW 1/4 of Section 20.



Description of corner evidence found:

None

(See map of Survey dated September, 1979)



Description of monument and accessories I established to perpetuate the original location of this corner

At corner point I set 2½"x30" iron pipe with brass cap marked as shown, 26" in ground, from which:


A 12" Ponderosa Pine bears North, 6.3 ft., marked NW1/16 S20 BT.

A 6" Mahogany bears S 61 W, 10.9 ft., marked X BT.

Raised mound of stone.

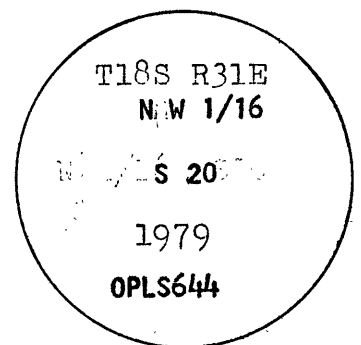

duane i. griffith



Nailed brass washer to BT blazes, used steel tape and magnetic compass with 170 East declination measured to center of BTs.

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 24 day of Oct 1979
Robert D. Dwyer by _____
(COUNTY OFFICIAL) (DEPUTY)