


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Line tree established by Reuben R. Leigh under General Land Office Contract No. 462 dated April 11, 1883.

Surveyor General's records state:
North bet secs 21 & 22 va 19°E
47.60 Pine 50 ins dia.

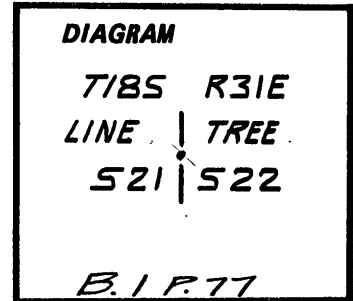

Description of corner evidence found:

At assumed line tree location found 59" diameter double Ponderosa Pine snag dead and standing with 2 distinct hacks on North face and 2 distinct hacks on South face. This snag matches the record distance call and is on line between the corners on each side.

Description of monument and accessories | established to perpetuate the original location of this corner:

Accepted found snag as original line tree and perpetuated location. Magnetic Declination 19° East.

Marked 2 bearing trees:

a 7" dbh Ponderosa Pine bears North 24°53' West, 19.50 ft., scribed "APS21BT";
a 6" dbh Juniper bears South 82°51' East, 25.56 ft., scribed "APS22BT".

Nailed brass washer marked "AS&E LS 1026" in lower blaze of BT's.

Painted 6 inch red band and faces red and nailed signs 54-3 and 54-4 on bearing trees. Also painted 6 inch red band on line tree and nailed sign 54-2 on East face and sign 54-4 on West face.

Set steel post with signs 54-2 and 54-4 North, 6.0 ft. from line tree.

I hereby certify the above line tree was re-established as herein described on September 27, 1983.

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 28 day of Dec, 1983
Robert D. Bayett (COUNTY OFFICIAL) David B. Armstrong (DEPUTY)

