

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established in 1883 by Reuben R. Leigh, under General Land Office Contract No. 462.


Surveyor General's records state:

Set post 3 ft. long 3 in. square 12 ins. in ground for $\frac{1}{4}$ sec cor marked $\frac{1}{4}$ on S and W face from which,

A pine, 44 in. dia. bears N87°W 7 lks. dist. marked $\frac{1}{4}$ S BT

A pine, 4 in. dia. bears S80°E 58 lks. dist. marked $\frac{1}{4}$ S BT

Note: No restoration appears in County records.

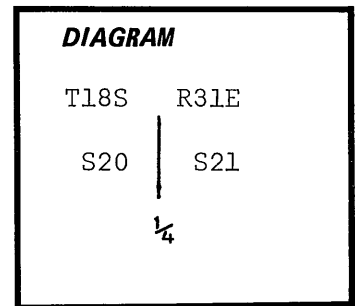

Description of corner evidence found:

At assumed corner location, I found

A p.pine stump, 44 in. dia. bearing N42°30'W 4.62 ft.

A p.pine, 16 in. dia., live and face grown over, bearing S80°E 58 lks. dist.

I opened up blaze and found scribing

Description of monument and accessories I established to perpetuate the original location of this corner:

As evidence in vicinity of corner agrees with GLO original record, at record bearing and distance from found original bearing trees, I set a 30 in. long 2.5 alum. cap marked:

T18S R31E
 $\frac{1}{4}$
S20 S21
RLS 1067
1978


New bearing trees:

A p.pine, 13 in. dia. bears S23°W 29.0 ft. dist. scribed $\frac{1}{4}$ S20 BT


A p.pine, 15 in. dia. bears S77°E 38.28 ft. dist. scribed $\frac{1}{4}$ S21 BT

I placed a brass washer marked LS 1067 below scribing and USFS on all bearing trees. I hereby certify the above corner monument was re-established as herein described on July 6, 1978. Witnesses: Carl E. Sundet

Terry Butler



Sherman E. Anderson



Office of..... *Surveyor* County of..... *Grant*
State of..... *Oregon* I hereby certify that the within instrument was filed in this office
for record on the..... *21* day of..... *Sept* 19.. *78* ..
..... *Robert J. Bright* by
(COUNTY OFFICIAL) (DEPUTY)