

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


T-9

History of original corner establishment:

The original GLO survey was done by Reuben R. Leigh under contract no. 462, dated April 11, 1883.

The field notes state:

North, 40.00 chs, set a basalt stone 18 x 10 x 7 ins. for $\frac{1}{4}$ Sec. Cor. from which bears a juniper 10 in. dia. S 40° W, 17 lks " $\frac{1}{4}$ S, BT", a fir 12 in. dia. N 62° E, 44 lks, marked " $\frac{1}{4}$ S, BT".



Description of corner evidence found:

Found a 18 x 10 x 7 ins. stone marked " $\frac{1}{4}$ " on west face from which bears:
A 10 in. dia. juniper, S 30° 35' W, 11.0'
A down fir snag, N 68° E, approx. 30'



Both BT's have visible scribing.

Description of monument and accessories I established to perpetuate the original location of this corner

On 4/23/87, at the location of the stone, we set a all alum. monument, $2\frac{1}{2}$ " x 30", with a $3\frac{1}{4}$ " dia. cap stamped " $\frac{1}{4}$, S 28, S 29, T 18 S, R 31 E, 1987, PLS 1288", buried 14", 16" above the ground in a stone mound. Attached land survey and boundary signs to a 4" fir 1' north of the corner.

A 6 in. dia. mahogany bears N 41° 40' E, 22.9', scribed " $\frac{1}{4}$, S 28, BT"

All BT's have a 6" band of red paint, Attention and BT signs.

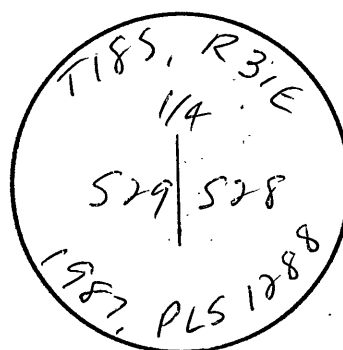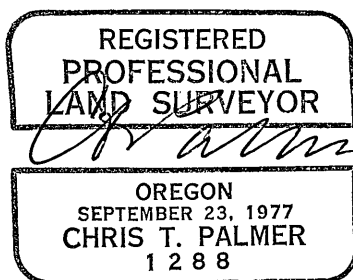

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office for record on the 18 day of June, 1987, at o'clock m., (signed)
Robert D. Bogan by
(COUNTY OFFICIAL) (DEPUTY)