

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

The original GLO survey was done by Reuben R. Leigh under contract no. 462, dated April 11, 1883.

The field notes state:

North, 80.00 chs, set a basalt stone 18 x 16 x 16 ins. for corner to Sections 28, 29, 32 and 33 with 1 notch on S and 4 notches E edges from which a pine 15 in. dia. bears S 73°W, 210 lks, marked "T 18 S, R 31 E, S 32, BT", a 18 in. dia. pine bears S 65°E, 101 lks, marked "T 18 S, R 31 E, S 33, BT", a pine 5 in. dia. bears N 65°W, 160 lks, marked "T 18 S, R 31 E, S 29, BT".

DIAGRAM

T 18 S	R 31 E
S 29	S 28
S 32	S 33

Description of corner evidence found:

Found a 18 x 16 x 12 ins. stone with 4 notches on E and 1 notch on S faces from which bears:

A 60 in. dia. pine, N 64°34'20"W, 103.5'
A 38 in. dia. pine, S 65°06'E, 66.8'



All BT's have visible scribing.

Description of monument and accessories established to perpetuate the original location of this corner

On 4/24/87, at the location of the stone, we set an all alum. monument, 2 1/2" x 30", with a 3 1/4" dia. cap stamped "S 28, S 29, S 32, S 33, T 18 S, R 31 E, 1987, PLS 1288", buried 22", 8" above the ground in a stone mound. Attached a boundary sign to a mahogany, 15' north of the corner and set a steel fence post 2' south of the corner with a land survey sign attached.

A 7 in. dia. juniper bears S 39°44'W, 36.2', scribed "S 32, T 18 S, R 31 E, BT"
A 5/8" dia. iron pin with an alum. cap bears N 36°40'E, 20.75'.

All BT's have a 6" band of red paint, Attention and BT signs.

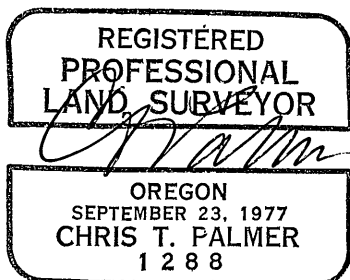

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office for record on the 18 day of June, 1987, at 0 o'clock 00 m., (signed) Robert B. Baggett by Chris T. Palmer (DEPUTY)
(COUNTY OFFICIAL)