


History of original corner establishment:

The original G.L.O. Survey for this township line was done by Reuben R. Leigh under contract no. 462 dated April 11, 1883.

the original field notes state:

- West on S. bndry of sec. 32
- 40.00 Set a basalt stone 14x12x8 ins. for 1/4 sec. cor. marked 1/4 on N. face, from which;
- a pine 14 ins. bears N.89°W. 22 lks. dist. marked 1/4S BT
- a juniper 18 ins. bears S.45°W. 26 lks. dist. marked 1/4S BT

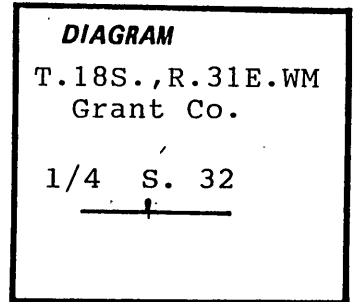


Description of corner evidence found:

On June 6, 1989 we found a 14x12x7 marked stone, from which;
a 17 ins. pine bears N.87°W. 15.2 ft. dist. with visible scribing
a 24 ins. juniper bears S.45°W. 17.5 ft. dist. with visible scribing

Description of monument and accessories I established to perpetuate the original location of this corner:

At the location of the marked stone we set an all aluminum monument, 2-1/2" dia. x 30" long, with a 3-1/4" dia. cap stamped:

T18S R31E
1/4 + S.32
PLS 1288
1989

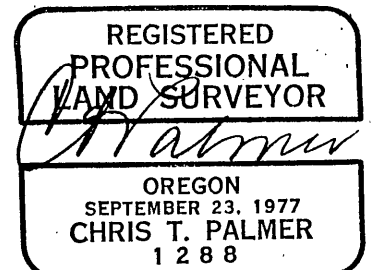

Monument is buried 12", 18" above the ground in a 18" high x 3' dia. stone mound. Original stone buried alongside.

All B.T.s have a 6" band of red paint, land survey sign (54-9), B.T. sign (54-3) and a brass washer stamped "PLS 1288" set at the base.

Set stl. fence post with land survey sign (54-9) alongside.

Witnesses: Cork Palmer

Office of.....Surveyor..... County of.....Harney & Grant.....
State of.....Oregon....., I hereby certify that the within instrument was filed in this office
for record on the 30 day of JAN, 1990
Chris T. Palmer H.C.S. by
(COUNTY OFFICIAL) (DEPUTY)

Filed: 8/7/89

Form R6-7100-57 (9/71)

Robert D. Dugan G.C.S.
Filed 1-30-90

Z-7