

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


7-12

History of original corner establishment:

The original GLO survey was done by Reuben R. Leigh under contract no. 462, dated April 11, 1883.

The field notes state:

East, 40.00 chs, set a basalt stone 14 x 12 x 7 ins. for $\frac{1}{4}$ sec. Cor. from which bears a fir 12 in. dia. S 85°W, 8 lks, marked " $\frac{1}{4}$ S, BT", a fir 50 in. dia. N 40°E, 47 lks, marked " $\frac{1}{4}$ S, BT".



Description of corner evidence found:



Found 14 x 12 x 8 ins. stone marked " $\frac{1}{4}$ " on north face from which bears: A 12 in. dia. rotten fir stump, S 85°W, 5.3', with visible scribing.

Description of monument and accessories I established to perpetuate the original location of this corner

On 5/18/87, at the location of the marked stone, we set an all alum. monument, 2 $\frac{1}{2}$ " x 30", with a 3 $\frac{1}{4}$ " dia. cap stamped " $\frac{1}{4}$, S 33, T 18 S, T 19 S, R 31 E, 1987, PLS 1288", buried 16", 14" above the ground in a stone mound.

A 14 in. dia. w. fir bears N 48°12'W, 25.7', scribed " $\frac{1}{4}$, S 33, BT"

All BT's have a 6" band of red paint, Attention and BT signs.

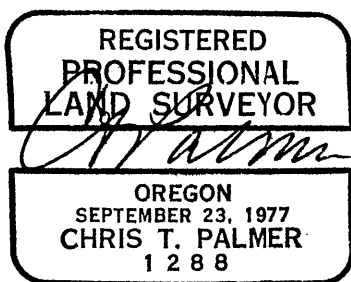

Office of Surveyors County of Grant & Harney
 State of Oregon, I hereby certify that the within instrument was filed in this office
 for record on the 18th day of June, 1987, at o'clock m., (signed)
Robert O. Baggett by
 (COUNTY OFFICIAL) (DEPUTY)
G.C.S.