

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


File #WEG78.P
Index File #N-15

History of original corner establishment:

Original corner set by Reuben R. Leigh under contract number 489 dated August 15, 1883.

The government field notes state:

39.95 Set a basalt stone 16x14x8 ins 10 ins in the ground for 1/4 Sec. cor marked 1/4 on W. face from which a pine 18 ins. diam. bears N 25° E. 51 lks dist. marked 1/4 S B.T. A pine 40 ins. diam. bears S20° W 176 lks dist. marked 1/4 S B.T.




No record of subsequent remonumentation found in county records.

Description of corner evidence found:

I did not find the original corner stone. I reestablished the corner position measuring from the face of the one remaining bearing tree.

From the corner position:

A 27" DBH PP Bears N25° E 33.66 Ft. Scribed "1/4S" rest grown over
I find no trace of the other original BT.

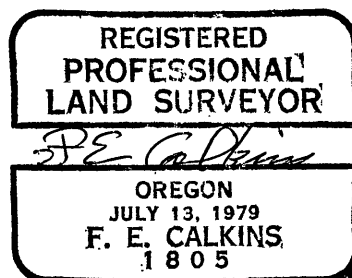

Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 30" long 2-1/2" dia. aluminum pipe with 3-1/4" cap marked:
22" in ground & erected a mound of stones around it.

from which I scribe NEW BEARING TREES:

A 13" DBH PP Bears S82° W 29.1 Ft., scribed 1/4 S22 BT
An 11" DBH PP Bears N31° W 28.0 Ft., scribed 1/4 S15 BT

U.S. DEPT.
OF AGRICULTURE
UNLAWFUL TO DISTURB
T18S R32E
S15
1/4 S22
OPLS 1805
1980
CADASTRAL SURVEY
FOREST SERVICE

Painted faces & bands around BT's red & attached BT & Attention tags.
Drove a 6 Ft. long steel fence post 2 - Ft. in ground 6 Ft. N of corner & attached an attention tag to it.
Used steel tape & magnetic staff compass with 20° East variation, measuring to the center of the new BT's.
This corner was set August 6, 1980.
Witness: F.R. Palmer & S.E. Trask

Office of _____ County Surveyor _____ County of _____ Grant _____
State of Oregon, I hereby certify that the within instrument was filed
in this office for record on the 8th day of Sept, 1980
Robert H. Beyer by _____
(COUNTY OFFICIAL) (DEPUTY)