


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**History of original corner establishment:**

Original GLO survey done by Rueben R. Leigh under contract no. 489 dated Aug. 15, 1883. Original field notes state:

40.00 Set a basalt stone 20x6x5 ins. 15 ins. in the ground for  $\frac{1}{4}$  sec. cor. marked  $\frac{1}{4}$  on W. face and raised a mound of stone  $1\frac{1}{2}$  ft. high  $3\frac{1}{2}$  ft. base alongside.



**Description of corner evidence found:**

On Aug. 11, 1983 I found a 16x10x5 stone, with  $\frac{1}{4}$  marked on one face in a good mound of stones. A stl. fence post with BLM tag marked "cor. is here" laying alongside mound.

Corner lies just west of small drainage, in open, sagebrush area. Poor, north/south road approx. 1100 ft. west.

**Description of monument and accessories | established to perpetuate the original location of this corner:**

On Aug. 11, 1983 at the location of the marked stone I set a standard U.S.F.S. all aluminum monument,  $2\frac{1}{2}$ " dia. x 30" high, with a 3" cap stamped:



Monument buried 8", 22" above the ground, in a 18" high x 30" dia. stone mound.

Buried original stone alongside.

Set stl. fence post with attention sign alongside.

No BT's set as no trees within limits.

Witnesses: P. Zabala, M. Walker

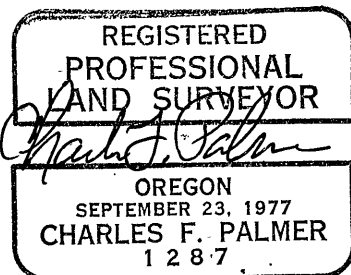

Office of.....Surveyor.....County of.....Grant  
State of.....Oregon....., I hereby certify that the within instrument was filed in this office  
for record on the 27 day of Dec, 1983  
Robert D. Baggett (COUNTY OFFICIAL) \_\_\_\_\_ (DEPUTY)