


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Original GLO survey done by Rueben R. Leigh under contract no. 489 dated Aug. 15, 1883. Original field notes state:

40.00 Set a basalt stone 24x18x10 ins. in mound of stone $1\frac{1}{2}$ ft. high & $3\frac{1}{2}$ ft. base for $\frac{1}{4}$ sec. cor. marked $\frac{1}{4}$ on W. face. I could not set the stone on account of rock hence built mound of stone around rock. Pits impracticable.

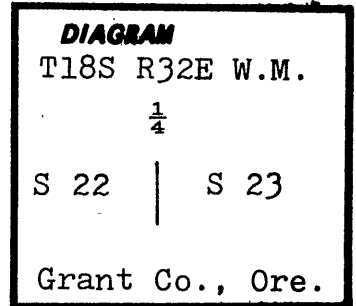

Description of corner evidence found:

On Aug. 10, 1983 I found a 19x14x8 stone in a good mound of stone with $\frac{1}{4}$ marked on west face. A cruiser tag on a 14" pine, approx. 50 ft. west of the mound is marked "approx. $\frac{1}{4}$ "

Corner lies on west slope just below a north/south ridge approx. 1800 ft. west of the "military road". Medium pine.

Description of monument and accessories | established to perpetuate the original location of this corner:

On Aug. 10, 1983 at the location of the marked stone I set a standard U.S. Forest Service all aluminum monument, $2\frac{1}{2}$ " dia. x 30" high, with a 3" cap stamped:

Monument buried 20", 10" above the ground, in a 10" high x 30" dia. stone mound.

Buried original stone alongside.

Set stl. fence post with attention sign alongside.



New BT's

A 14" p.pine bears S.61°10'E., 16.4 ft. scribed " $\frac{1}{4}$ S23,BT"

A 16" p.pine bears S.59°40'W., 51.3 ft. scribed " $\frac{1}{4}$ S22,BT" (this is the tree with the cruiser tag)

BT's have a 6" band of red paint, BT & attention signs, and a brass washer with "PLS 1287" at the base.

Witnesses: P. Zabala, M. Walker

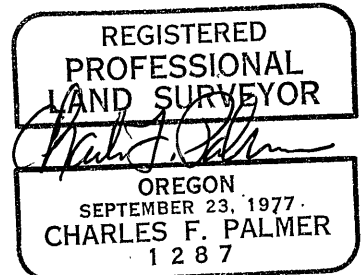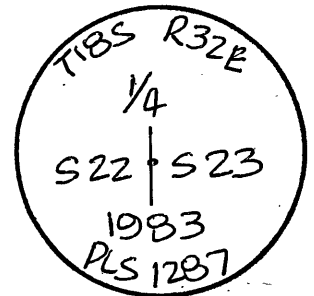

Office of.....Surveyor.....County of.....Grant
State of.....Oregon....., I hereby certify that the within instrument was filed in this office
for record on the 27 day of Dec, 1983
Robert D. Bager by.....
(COUNTY OFFICIAL) (DEPUTY)