

CERTIFIED RECORD OF LAND CORNER MONUMENTATION**History of original corner establishment:**

Original GLO survey done by Rueben R. Leigh
under contract no. 489 dated Aug. 15, 1883.
Original field notes state:

40.00 Set a basalt stone 14x8x6 ins. 9 ins. in
the ground for $\frac{1}{4}$ sec. cor. marked $\frac{1}{4}$ on W.
face from which

A pine 24 ins. diam. bears S.10°W. 210 lks dist.
marked $\frac{1}{4}$ SBT

DIAGRAM

T18S R32E W.M.

 $\frac{1}{4}$

S 28

S 27

Grant Co., Ore.

Description of corner evidence found:

On Aug. 15, 1983 I found a 14x9x5 stone, with $\frac{1}{4}$ on one face, in a
good mound of stone. A 1" iron pipe also set in the center of the
mound. A BLM cruiser tag attached to a 12" pine reads "N45°W, 43 lks"

A large, 30" down, rotten pine snag bears S.10°W., 141.5 ft. clearly
scribed " $\frac{1}{4}$ SBT" with old BT tag marked "1958, RTS & JP".

Corner lies on steep, west slope above drainage running SW.

**Description of monument and accessories I established to perpetuate the
original location of this corner:**

On Aug. 15, 1983 at the location of the ~~iron pipe~~ I set a standard
U.S. Forest Service all aluminum monument, 2 $\frac{1}{2}$ " dia. x 30" high,
with a 3" cap stamped:

Monument buried 24", 6" above the ground, in a 6"
high x 30" dia. stone mound.

Original stone and iron pipe buried alongside.

Set stl. fence post with attention sign alongside.



New BT's

A 12" p. pine bears S.46°E., 28.0 ft. scribed
" $\frac{1}{4}$ S27, BT"

A 10" p. pine bears S.82°W., 33.5 ft. scribed
" $\frac{1}{4}$ S28, BT"

BT's have a 6" band of red paint, BT & attention signs, and a
brass washer with "PLS 1287" at the base.

Witnesses: P. Zabala, M. Walker

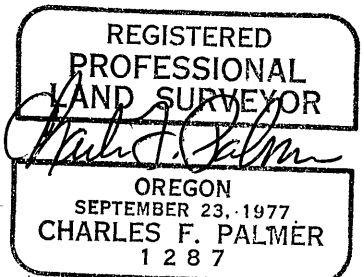

Office of..... Surveyor..... County of..... Grant
State of..... Oregon....., I hereby certify that the within instrument was filed in this office
for record on the...27... day of..... Dec....., 1983
Robert D. Baggett by.....
(COUNTY OFFICIAL) (DEPUTY)