

CERTIFIED RECORD OF LAND CORNER MONUMENTATION**History of original corner establishment:**

Original GLO survey done by Rueben R. Leigh under contract no. 489 dated Aug. 15, 1883. Original field notes state:

S.89°59'W. on a true line bet. sec.s 27 & 34 with same var.

39.78 Set a basalt stone 16x14x10 ins. 10 ins. in the ground for $\frac{1}{4}$ sec. cor. marked $\frac{1}{4}$ on N. face and raised a mound of stone 1 $\frac{1}{2}$ ft. high & 3 $\frac{1}{2}$ ft. base alongside. Pits impracticable.

DIAGRAM

T18S R32E W.M.

S 27

 $\frac{1}{4}$

S 34

Grant Co., Ore.

Description of corner evidence found:

On Aug. 11, 1983 I found a 22x16x6 stone, with small top portion broken off, together with $\frac{1}{4}$ on one face, in a good mound of stone. Corner lies on top of fairly flat, north/south ridge approx. 130 ft. west of north/south fence.

Description of monument and accessories I established to perpetuate the original location of this corner:

On Aug. 11, 1983 at the location of the marked stone I set a standard U.S. Forest Service all aluminum monument, 2 $\frac{1}{2}$ " dia. x 30" high, with a 3" cap stamped:

Monument buried 14", 16" above the ground, in a 12" high x 3' dia. stone mound. Original stone buried alongside.

Set stl. fence post with boundary and attention sign south of corner. Forest boundary posted south from corner.



New BT's

A 16" p. pine bears N.57°20'E., 30.7 ft. scribed " $\frac{1}{4}$ S27,BT"

A 10" w. juniper bears S.16°50'E., 15.7 ft. scribed " $\frac{1}{4}$ S34,BT"

BT's have a 6" band of red paint, BT & attention signs, and a brass washer with "PLS 1287" at the base.

Witnesses: P. Zabala, M. Walker

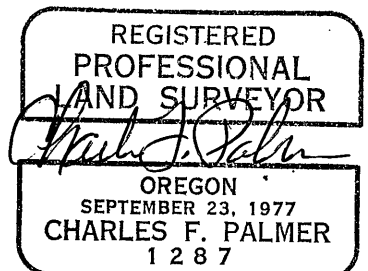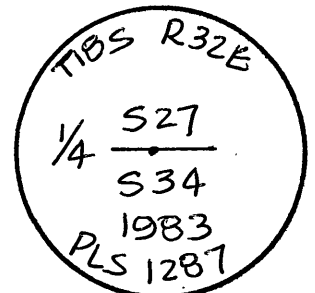

Office of.....Surveyor.....County of.....Grant
State of.....Oregon....., I hereby certify that the within instrument was filed in this office
for record on the 27 day of Dec, 1983
by.....
(COUNTY OFFICIAL) (DEPUTY)