


CERTIFIED RECORD OF LAND CORNER MONUMENTATION**History of original corner establishment:**

Original GLO survey done by Rueben R. Leigh
under contract no. 489 dated Aug. 15, 1883.
Original field notes state:

40.00 Set a basalt stone 12x10x8 ins. 8 ins. in
the ground for $\frac{1}{4}$ sec. cor. marked $\frac{1}{4}$ on W.
face, dug pits 18x18x12 ins. N & S of
stone $5\frac{1}{2}$ ft. dist. and raised a mound of
earth $1\frac{1}{2}$ ft. high and $3\frac{1}{2}$ ft. base alongside.

**Description of corner evidence found:**

On Aug. 18, 1983 I found a 12x10x8 stone, marked $\frac{1}{4}$ on west face,
in a good mound of stone.

Corner lies on open, sagebrush flat, just east of drainage running
south.

**Description of monument and accessories I established to perpetuate the
original location of this corner:**



On Aug. 18, 1983 at the location of the marked stone I set a standard
U.S. Forest Service all aluminum monument, $2\frac{1}{2}$ " dia. x 30" high, with
a 3" cap stamped:

Monument buried 13", 17" above the ground, in a
16" high x 3' dia. stone mound. Original stone
buried alongside.

Set stl. fence post with attention sign 2 ft.
west of the corner.

No BT's established as no trees within limits.

Witnesses: P. Zabala, H. Palmer, M. Walker

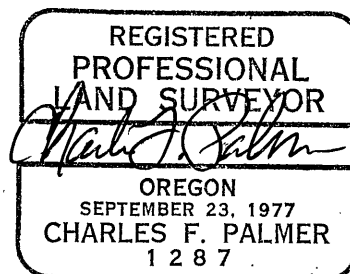

Office of..... Surveyor..... County of..... Grant
State of..... Oregon....., I hereby certify that the within instrument was filed in this office
for record on the 27 day of Dec, 1983
Robert D. Boyce by.....
(COUNTY OFFICIAL) (DEPUTY)