

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Refer to: Plat of Wilson 1985 Cadastral Survey
Section 29, T.7S., R.27E., W.M.


R-7

History of original corner establishment:

Frank W. Campbell, under G.L.O. contract number 521, dated Jan. 8, 1885, set a basalt stone 15"X 10"X 6" ten inches in the ground. Stone marked 1/4 on north face.

From the corner:

A Pine, 15" dia., N78°E, 75 lks.
A Pine, 8" dia., S75°E, 43 lks.

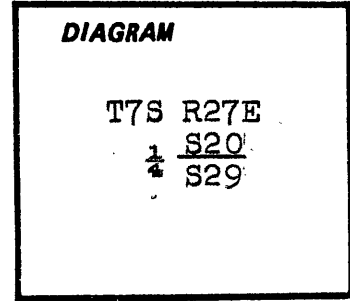

Description of corner evidence found:

I found a stone 15"X 9"X 6" marked 1/4, lying on its side in a hole.

I found no evidence of the BTs.

Description of monument and accessories I established to perpetuate the original location of this corner:

At the original corner point I set a 2 1/2"X 30" alum. pipe with a 3" alum. cap containing a magnet and marked:

I buried the original stone alongside.
I built a stone mound around the monument.

T7S R27E
1/4 S20
1/4 S29
PLS 1832
1986

From the corner:

A Juniper, 12" dia., S24 3/4°W, 12.6 ft.
marked: 1/4 S29 BT
A Juniper, 13" dia., N62°E, 11.5 ft.
marked: 1/4 S20 BT

BTs have blaze and a 6" stripe painted red, a BT tag, an "Attention" sign and an alum. "PLS 1832" washer nailed to the bottom of the blaze. There is a 6' steel fence post with an "Attention" sign within 5' of the corner.

Measured to center of BTs using steel tape and staff compass. Magnetic declination set at 18 1/2°E.

April 3, 1986

Office of... *Sumner* ... County of... *Grant* ...
State of... *Oregon* ... I hereby certify that the within instrument was filed in this office
for record on the... *25* day of... *July* ... 19... *86*
... *Robert D. Wright* ... by ...
(COUNTY OFFICIAL) (DEPUTY)

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Fayette S. Munro
OREGON
JULY 13, 1979
FAYETTE S. MUNRO
1832