


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

Refer to: Plat of Wilson 1985 Cadastral Survey
Section 29, T.7S., R.27E., W.M.

T-7

History of original corner establishment:

No record of previous monumentation.

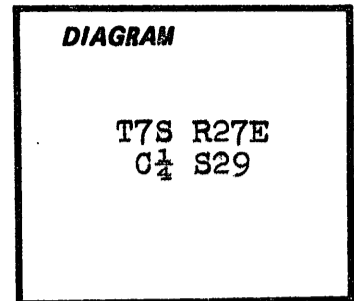

Description of corner evidence found:

None.

Description of monument and accessories I established to perpetuate the original location of this corner:

At the corner point I set a 2 $\frac{1}{2}$ " X 30" alum. pipe with a 3" alum. cap containing a magnet and marked:

I built a stone mound around the monument.

T7S R27E
C $\frac{1}{4}$ S29
PLS 1832
1986

From the corner:

A Douglas Fir, 16" dia., N24 3/4°W, 34.2 ft.
marked: C $\frac{1}{4}$ S29 BT

A Ponderosa Pine, 13" dia., N88°E, 25.2 ft.
marked: C $\frac{1}{4}$ S29 BT

BTs have blaze and a 6" stripe painted red, a BT tag, a "Land Survey Monument" sign and an alum. "PLS 1832" washer nailed to the bottom of the blaze. There is a 6' steel fence post with a "Land Survey Monument" sign within 5' of the corner.

Measured to center of BTs using steel tape and staff compass. Magnetic declination set at 18 $\frac{1}{2}$ °E.

April 13, 1986

Office of..... *Surveyor* County of..... *Grant*

State of..... *Oregon* I hereby certify that the within instrument was filed in this office
for record on the... *25* day of... *July*, 19... *86*

..... *Robert D. Bayne* by..... *Fayette S. Munro*

(COUNTY OFFICIAL) (DEPUTY)

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Fayette S. Munro

OREGON
JULY 13, 1979
FAYETTE S. MUNRO
1832