

RECORD OF LAND CORNER MONUMENTATION


SOUTHWEST CORNER SECTION 4, T. 7 S., R. 28 E., W.M.

ORIGINALLY ESTABLISHED BY: Frank W. Campbell, U.S. Deputy Surveyor

CONTRACT NUMBER: 521

CONTRACT DATE: January 8, 1885

SUBSEQUENT SURVEYS: Remonumentation by Duane I. Griffith, PLS, filed August 8, 1974 in the office of the Grant County Surveyor

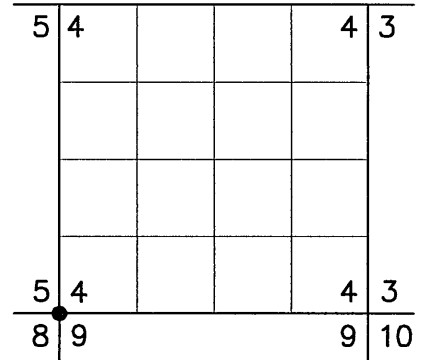

ORIGINAL DESCRIPTION: Set a basalt stone 16x10x7 ins 11 ins in the ground, for cor to Sec's 4, 5, 8 & 9, marked with 5 notches on S. and 4 notches on E. edges. from which

A juniper 12 ins in diam. bears N.7°E., 168 lks. dist. marked T7S R28E S4 BT

A pine 30 ins in diam. bears S.10°E., 147 lks. dist. marked T7S R28E S9 BT

A pine 10 ins in diam. bears S.23°W., 181 lks. dist. marked T7S R28E S8 BT

A juniper 12 ins in diam. bears N.44°W., 193 lks. dist. marked T7S R28E S5 BT

GRIFFITH'S 1974 DESCRIPTION: Found stone, call size, faint marks visible, in a mound of stone from which: Original BTs.

A 14" +/- Juniper dead and down, badly burnt, bears N 7 E, 110.9 ft. Partial scribes visible.

A 24" Juniper, fair condition, bears N 44 W, 127.4 ft. scribes visible.

No evidence of other BTs found.

At corner position set 2 1/2" x 30" iron post with brass cap, marked as shown, 18" in ground, raised mound of stone 7' at base to top of cap. From which, new BTs:

A 8" Juniper bears N 71 E, 195.6 ft. marked T 7 S R 28 E S 4 BT

A 10" Juniper bears S 33 E, 70.7 ft. marked T 7 S R 28 E S 9 BT

A 12" Pine bears S 67 W, 109.7 ft. marked T 7 S R 28 E S 8 BT

EVIDENCE FOUND: Found a 2 1/2" galvanized iron pipe with attached 2 1/2" brass cap marked as shown below, projecting 14" above ground in a 3 ft. diameter mound of stone. From which, the following bearing trees were found:

▶ A juniper snag 12" dbh bears N.71°E., 195.6 ft. with scribing visible in a partially healed double blaze

▶ A multi-trunk juniper 15" dbh bears S.33°E., 70.7 ft. with scribing visible in a partially healed double blaze

No other bearing trees were found, as the area has been subjected to a wildland fire in the recent past.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

I accept the found brass capped monument for the true corner position.

From which, **I SCRIBE A NEW BEARING TREE:**


▶ A juniper 10" dbh bears N.77°W., 102.8 ft. marked T7SR28ES5 in upper blaze and BT in lower blaze

Also from which, **I SET NEW REFERENCE POINTS:**

▶ A 5/8"x15" iron pin, driven to refusal, bears N.51°21'E., 54.57 ft., with attached 2" aluminum cap marked RP 1 2022 PLS 69454

▶ A 5/8"x15" iron pin, driven to refusal, bears S.52°39'W., 27.63 ft., with attached 2" aluminum cap marked RP 2 2022 PLS 69454 (set in an east-west fence)

CORNER MONUMENT MARKED:

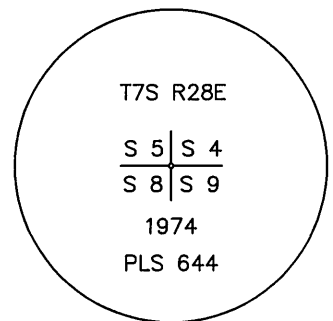

Repaired the mound of stone, and built it back up to the cap. Painted a 6 inch red band around each bearing tree, and also painted the blazes red. Attached USFS 54-3 and 54-9 signs to the bearing trees. Distance to new BT measured with a steel tape, measuring to a 60d nail driven in the right-side-center at the root crown of the tree, with an attached 1 1/2" aluminum washer stamped PLS 69454. Bearings to trees measured with a magnetic compass with 14° East declination. Used RTK GPS to measure the reference points. Bearings are geodetic, derived by GPS observation at the corner.

RESTORATION BY, STAMP AND DATE:

Work Performed May 2, 2022 by:

Jason L. Hatfield, PLS
Daniel B. Lee

USDA FOREST SERVICE
NORTHEAST OREGON LAND ZONE
1550 Dewey Avenue, Suite A
Baker City, OR 97814
(541) 523-1337

RECEIVED AND FILED
GRANT COUNTY SURVEYOR

JUN 14 2022

BY:

REGISTERED
PROFESSIONAL
LAND SURVEYOR

OREGON
NOVEMBER 30, 2007
JASON L. HATFIELD
#69454

EXPIRES: 6/30/2023