


RECORD OF LAND CORNER MONUMENTATION

SOUTH 1/4 CORNER SECTION 3, T. 7 S., R. 28 E., W.M.

ORIGINALLY ESTABLISHED BY: Frank W. Campbell, U.S. Deputy Surveyor

CONTRACT NUMBER: 521

CONTRACT DATE: January 8, 1885

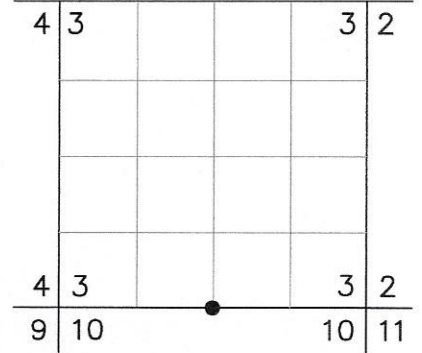

ORIGINAL DESCRIPTION: Set a basalt stone 12x12x10 ins 8 ins in the ground, for 1/4 sec cor., marked 1/4 on N. face, from which
 A fir 36 ins in diam. bears N85°W, 44 lks dist, marked 1/4S. B.T.
 A pine 24 ins in diam. bears S15°W, 52 lks dist, marked 1/4S. B.T.

EVIDENCE FOUND: Found stone 15"x12"x10", set 10" in ground marked 1/4, with one other stone alongside. From which, I also found the original northwest bearing tree, which is a 45" dbh Douglas-fir snag with completely healed blaze, which bears N.85°W., 28.7 ft. (measured to the healed blaze on the face of the tree). No remains of the southwest bearing tree could be found, as the area was subjected to a substantial fire 10 +/- years ago. I accept the position of the original marked stone for the 1/4 corner.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

At the position of the found stone, I set a standard USFS 2 1/2"x30" aluminum pipe with attached 3/4" aluminum cap, 20" in the ground. Raised a 2 ft. diameter mound of stone around the monument to top of cap. Cap is marked as shown below.

From which, **I SET NEW REFERENCE POINTS:**

- ▶ A 5/8"x 24" iron pin driven flush, bears N.31°13'E., 53.08 ft., with attached 2" aluminum cap marked *RP 1 2022 PLS 69454*
- ▶ A 5/8"x 24" iron pin, driven flush, bears N.28°49'W., 23.23 ft., with attached 2" aluminum cap marked *RP 2 2022 PLS 69454*

Also from which, **I SCRIBE NEW BEARING TREES:**

- ▶ A Douglas-fir 18" dbh bears S.42°34'E., 47.71 ft. marked *X* in upper blaze and *BT* in lower blaze
- ▶ A Douglas-fir 25" dbh bears S.36°52'W., 63.3 ft. marked *1/4S10* in upper blaze and *BT* in lower blaze

CORNER MONUMENT MARKED:



Set a plastic-encased magnet at the base of the pipe. Deposited corner stone east and alongside the pipe. Painted a 6 inch red band around the bearing trees, and also painted blazes red. Attached USFS 54-3 and 54-9 signs to BT's. Distances to new bearing trees were measured to a 60d nail driven in the side-center at the root crown of each tree, with an attached 1 1/2" aluminum washer stamped PLS 69454. Used RTK GPS to measure reference points. Bearings are geodetic, derived by GPS observation at the corner. Also set an aluminum guard post alongside, with USFS 54-2 and 54-9 signs attached.

RESTORATION BY, STAMP AND DATE:

Work Performed June 21, 2022 by:

Jason L. Hatfield, PLS
 Daniel B. Lee

USDA FOREST SERVICE
 NORTHEAST OREGON LAND ZONE
 1550 Dewey Avenue, Suite A
 Baker City, OR 97814
 (541) 523-1283

RECEIVED AND FILED
 GRANT COUNTY SURVEYOR

FEB 10 2023

BY:

REGISTERED
 PROFESSIONAL
 LAND SURVEYOR

OREGON
 NOVEMBER 30, 2007
 JASON L. HATFIELD
 #69454

EXPIRES: 6/30/2023