


CORNER RESTORATION

CORNER: N $\frac{1}{4}$ Sec:31 TWP: 7S. RANGE: 28E.

ORIGINAL SURVEY BY: Frank W. Campbell

CONTRACT NUMBER: 521

CONTRACT DATE: January 8, 1885

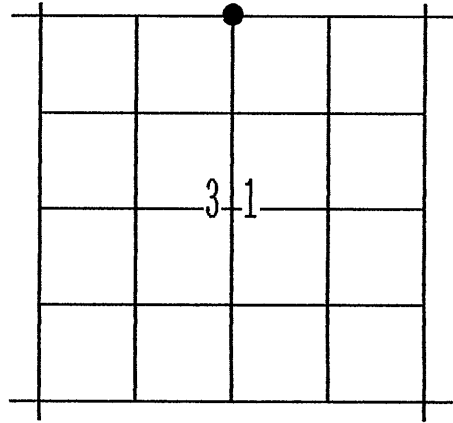

ORIGINAL DESCRIPTION: Set a basalt stone 15x8x7 ins. 10 ins. in the ground for 1/4 sec. cor. marked 1/4 on N. face and raised a mound of stone alongside.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
S.D. Follweiler
D.E. Mooney
R.J. Lewis

**RECEIVED AND
FILED**

JUL 27 1994

OFFICE OF COUNTY SURVEYOR
Attest: *Jeremy Russell*

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett

OREGON
JULY 12, 1983
ROBERT D. BAGETT
598

Renewal Date 12/31/94

May 24, 1994

Grant County Surveyor

EVIDENCE FOUND: Found a basalt stone 14"x8"x6" in a mound of stone marked 1/4 on one face. I accept this stone for the 1/4 corner position.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

At the corner point: I set a 1 $\frac{1}{2}$ "x30" galv. iron pipe, 26" in the ground, with attached Grant County Surveyor brass cap marked as shown.

From which I SCRIBE NEW BEARING TREES:
A Juniper 7"diam., bears N41°E, 129.3 ft. marked 1/4 S30 CSBT.
A Juniper 7"diam., bears S64°E, 49.7 ft. marked 1/4 S31 CSBT.
A Juniper 7"diam., bears N81°W, 113.2 ft. marked 1/4 S30 CSBT.

MONUMENT MARKED
GRANT COUNTY
SURVEYOR

T7S R28E
S30

$\frac{1}{4}$ _____

S31
1994

OPLS 598

Also: I SET A NEW REFERENCE POINT:

A 5/8"x30" iron pin, bears S45°W, 25.00 ft., with attached alum. cap marked GRANT COUNTY SURVEYOR RP 1. 1994 OPLS 598.

Buried marked stone Southeast and alongside iron pipe, raised a mound of stone 3 ft. base to top of cap. Used mag. compass with 20°E var. and a steel tape, measuring to a 50d nail driven in the side center at the root crown of the BT's. Attached BT tags to BT's.