

CORNER


RESTORATION

CORNER: NE Sec 31 TWP. ~~8S~~⁷ RANGE 28E.

ORIGINAL SURVEY BY: Frank W. Campbell

CONTRACT NUMBER: 521

CONTRACT DATE: Jan. 8, 1885

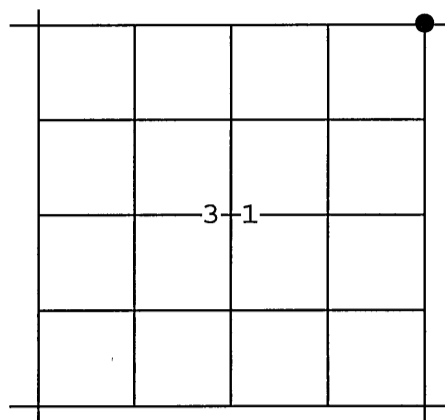

ORIGINAL DESCRIPTION: Set a basalt stone 14x10x4 ins., 9 ins. in the ground for cor. to Sec's. 29, 30, 31 & 32, marked with 1 notch on S. and 5 notches on E. edges and raised a mound of stone along side.

RESTORATION BY, STAMP AND DATE:

R.D. Bagett
S.D. Follweiler
D.E. Mooney
J.W. Russell

RECEIVED AND
FILED

Oct 10, 1995
OFFICE OF COUNTY SURVEYOR

Robert D. Bagett

ATTEST: *Jerry Russell*

REGISTERED
PROFESSIONAL
LAND SURVEYOR

Robert D. Bagett

OREGON
JULY 12, 1983
ROBERT D. BAGETT
598

Renewal Date 12/31/95

Sept. 26, 1995

Grant County Surveyor

EVIDENCE FOUND: Found a basalt stone 14x13x3 marked with 5 grooves on one face and 1 groove on an adjacent face, lying in a mound of stone. I accept this stone for the position of the section corner. It is harmoniously related to other known corners in this area.

DESCRIPTION OF MONUMENTS AND ACCESSORIES SET AND METHODS USED:

Show how trees are scribed and basis of bearings, including compass var.

At the corner point: I set a 1½"x30" galv. iron pipe, 28" in the ground, with attached Grant County Surveyor brass cap marked as shown.

From which I SCRIBE NEW BEARING TREES:

A Juniper 6" diam., bears N25°E, 6.4 ft.
marked T7SR28E S29 CSBT.

A Juniper 8" diam., bears S72°E, 30.2 ft.
marked T7SR28E S32 CSBT.

A Juniper 13" diam., bears S17°W, 15.4 ft.
marked T7SR28E S31 CSBT.

A Juniper 7" diam., bears N60°W, 20.8 ft.
marked T7SR28E S30 CSBT.

MONUMENT MARKED

GRANT COUNTY
SURVEYOR

T7S R28E
S30 | S29

S31 | S32

1995
OPLS 598

Buried marked stone South and alongside iron pipe, raised a mound of stone 3 ft. base to top of cap. Used mag. compass with 20°E var. and a steel tape, measuring to a 50d nail driven in the sidecenter at the root crown of the BT's. Attached BT tags to BT's.