


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

C-3

History of original corner establishment: CORNER MONUMENT WAS SET DURING A SURVEY FOR U.S. FOREST SERVICE, SECTION 6, T.7S., R.33E., WILLAMETTE MERIDIAN, OREGON 1978. 2" BRASS CAP SET BY PLS # 933 ON IRON POST MKD. C 1/4 S 6, T.7S., R.33E., 1978 PLS 933.

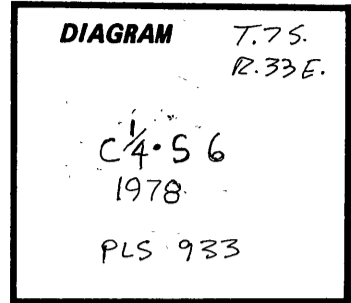

From which

- A pine, 11 ins. diam., bears N.25°51'E., 49.25 ft. dist., MKD C 1/4 S 6 BT
A pine, 12 ins. diam., bears S.67°19'W., 45.96 ft. dist., MKD C 1/4 S 6 BT

Description of corner evidence found: A PINE, 14" DIAM., BEARS S.66°10'W., 46.00 FT. (RECORD S 67°19'W., 45.96 FT.) HEALED BLAZE, U.S. FOREST SERVICE SIGNS 54-3 AND 54-9 ATTACHED.

A PINE, 12" DIAM., BEARS N.28°11'E., 49.25 FT. (RECORD N.29°51'E., 49.85 FT) HEALED BLAZE, U.S. FOREST SERVICE SIGNS 54-3 AND 54-9 ATTACHED.

A STEEL GUARD POST SET 5 FT. SOUTH OF CORNER WITH U.S. FOREST SERVICE SIGNS 54-2 AND 54-9 ATTACHED

A 2" BRASS CAP MKD. C 1/4 S 6 T.7S., R.33E., PLS 933, 1978, SET ON 2" IRON POST

Description of monument and accessories I established to perpetuate the original location of this corner: NEW BEARING TREE, A PINE, 14" DIAM., BEARS S.31°55'W., 22.50 FT., SCRIBED C 1/4 S 6 BT, BRASS WASHER #1341, U.S. FOREST SERVICE SIGNS 54-3 AND 54-9 ATTACHED, PAINTED 6" RED BAND AROUND TREE.

PAINTED 6" RED BAND AROUND EXISTING BT'S

SECURED STEEL GUARDPOST

MAGNETIC DECLINATION USED AT THIS CORNER TO ESTABLISH BEARINGS: DE; 19° E.

WITNESS: KEN BATES
SCOTT KRIKA

I HEREBY CERTIFY THE ABOVE CORNER POINT WAS PERPETUATED IN OCTOBER 1990, AS HEREON DESCRIBED.

REGISTERED PROFESSIONAL LAND SURVEYOR

Guy W. Streamer

OREGON SEPTEMBER 23, 1977 GUY W. STREAMER, JR. 1341

Office of: Surveyor County of: Grant
State of: Oregon, I hereby certify that the within instrument was filed in this office for record on the 27 day of Feb, 1991
Robert O. Luginbuhl by (COUNTY OFFICIAL) (DEPUTY)