


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established in October, 1884, by William R. Cradon under Contract No. 579.

Set basalt stone 18" x 12" x 6" 12 in. in ground marked  $\frac{1}{4}$  on North face.

Pine 36" diam. brs. S 59° E 107 lks. marked  $\frac{1}{4}$  S BT  
 Pine 36" diam. brs. N 85° W 70 lks. marked  $\frac{1}{4}$  S BT

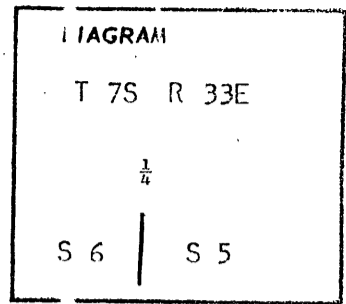

Description of corner evidence found:

Stone 18" x 12" x 5 1/2" 5 in. in ground.

Found 40" pine stump N 85° 10' W 70 lks. (26.4 ft.) with old sign.  
 Found 38" pine down S 58° E 107 lks. (70.6 ft.) with old sign.

Description of monument and accessories established to perpetuate the original location of this corner

Set 2 1/2" x 30" iron pipe 22" in ground with brass cap marked as shown from which I scribed two new bearing trees.


Pine 12 in. dia. brs. N 28° 23' W 43.40 ft. marked  $\frac{1}{4}$  S6 BT  
 Pine 11 in. dia. brs. N 65° 49' E 17.01 ft. marked  $\frac{1}{4}$  S5 BT

Nailed brass washer marked PLS 933 to BT blaze of trees. Set steel post 3 ft. West of corner. The corner is 310 ft. North of a road. Used T-2 and steel tape, measuring a horizontal distance to the center of bearing trees.

**REGISTERED  
 PROFESSIONAL  
 LAND SURVEYOR**

*David H. Krumbein*

OREGON  
 JULY 17, 1970  
 DAVID H. KRUMBEIN  
 933

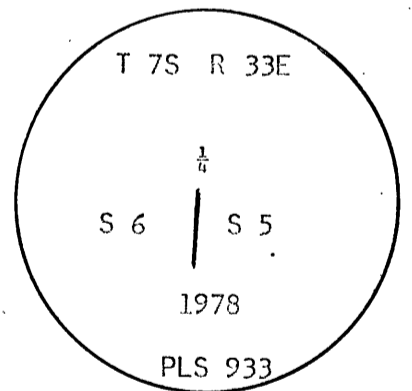

Office of.....County Surveyor..... County of.....Grant.....  
 State of.....Oregon....., I hereby certify that the within instrument was filed in this office  
 for record on the 20 day of Sept 1978  
*Robert D. Beatty* by.....  
 (COUNTY OFFICIAL) (DEPUTY)