


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Unsurveyed - subdivided section

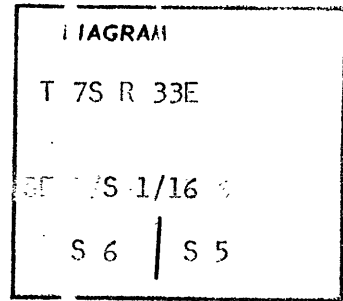

No record of subsequent remonumentation found in County Records.

Description of corner evidence found:

None.

Description of monument and accessories established to perpetuate the original location of this corner

Set 2 1/2" x 30" iron pipe 14" in ground. Raised mound around brass cap. Cap marked as shown from which I scribed bearing trees:


- A pine 12 in. diam. brs. N 76° W 40.75 ft. marked S 1/16 S6 BT
- A pine 10 in. diam. brs. N 39° E 14.90 ft. marked S 1/16 S5 BT

Mailed brass washer marked PLS 933 to the BT blaze of all trees. Set steel post 4 ft. North of corner. Used T-2 and steel tape, measuring a horizontal distance to the center of the bearing trees.

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

*David H. Krumbein*

OREGON  
JULY 17, 1970  
DAVID H. KRUMBEIN  
933

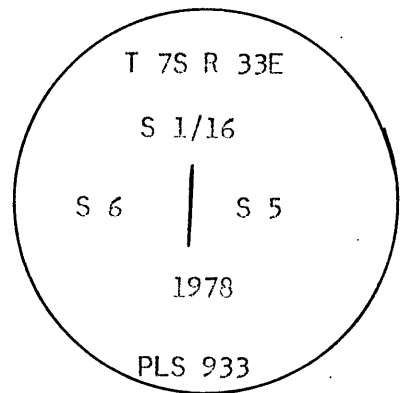

Office of ..... County Surveyor ..... County of ..... Grant .....

State of ..... Oregon ..... , I hereby certify that the within instrument was filed in this office

for record on the 20 day of Sept 1978

*Robert D. Begett* by ..... (DEPUTY)

(COUNTY OFFICIAL)