


**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**History of original corner establishment:**

Corner was first established by William R. Gradon in 1885 under Contract No. 519, dated October 2, 1884.  
Set a post 4' long, 4" square, 24" in the ground at the Corner.

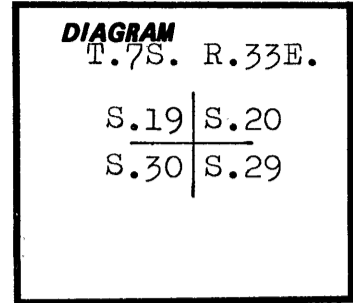

- 6" diam. Pine, N. 66° E., 15 lks., mkd. T7SR33ES20BT.
- 6" diam. Pine, S. 38° E., 22 lks., mkd. T7SR33ES29BT.
- 18" diam. Fir, S. 54° W., 29 lks., mkd. T7SR33ES30BT.
- 18" diam. Tamarack, N. 59° W., 50 lks., mkd. T7SR33ES19BT.

**Description of corner evidence found:**

Post gone.  
30" D.B.H. Douglas Fir, S. 54° W., 29 lks. with a healed face.  
18" Tamarack, N. 59° W., 50 lks. is now a small pile of rotten wood.  
No trace of other 2 B.T's..

**Description of monument and accessories established to perpetuate the original location of this corner:**

Set a 2½" diam. alum. cap in a 2½" X 30" alum. pipe at record distances from 2 remaining B.T's.. Cap mkd. per sketch. Set steel posts 3'± E. & W. of Cor. with mon. & attn. signs attached.

T7S	R33E
S19	S20
S30	S29
RPLS 1910	
1985	

- 8" D.B.H. Douglas Fir, N. 38° E., 20.9', scribed T7SR33ES20BT.
- 14" D.B.H. White Fir, S. 55½° E., 12.4', scribed T7SR33ES29BT.
- 9" D.B.H. White Fir, N. 21½° W., 11.3', scribed T7SR33ES19BT.
- Each B.T. has a brass washer mkd. RPLS 1910 set btwn. B & T, all B.T's. have a B.T. tag, attn. sign and bands and faces painted red, including Original B.T..

Declination; 18° 45' East.

**REGISTERED  
PROFESSIONAL  
LAND SURVEYOR**

*Clayton J. Martin*

**OREGON**  
JULY 18, 1930  
**CLAYTON-JESSE MARTIN**  
1910

C.J. MARTIN SURVEYING  
2751 JUNIPER ST.  
SWEET HOME, OR 97386

Office of Surveyor County of Grant  
State of Ore gon, I hereby certify that the within instrument was filed in this office  
for record on the 13 day of Aug, 1985  
Robert D. Baggett by \_\_\_\_\_  
(COUNTY OFFICIAL) (DEPUTY)