

CERTIFIED RECORD OF LAND CORNER MONUMENTATION


History of original corner establishment:

Corner was first established in 1884 by Herman D. Gradon under Contract No. 499, dated March 11, 1884.

Set a basalt stone 20" X 10" X 10", 15" in the ground marked 1/4 on North face.

20" diam. Pine, N. 21° E., 25 lks., mkd. 1/4SBT.

12" diam. Pine, S. 61° W., 44 lks., mkd. 1/4SBT.

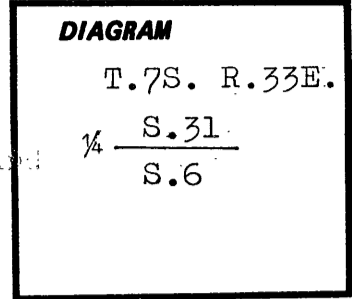

Description of corner evidence found:

Did not find Cornerstone, did not accept stone pile as bearings and distances fit nicely for another point. Fence Cor., 330'±, West.

31" D.B.H. Ponderosa Pine, (20" Pine) N. 21° E., 25 lks., with healed face. This tree is struck by lightning, nearly dead.

16" D.B.H. Ponderosa Pine, (12" Pine) S. 61° W., 44 lks., with scribes 1/4 visible in a partially open face.

Double blaze on Ponderosa Pine, N. 71° W., 18.5', not a B.T..

Description of monument and accessories established to perpetuate the original location of this corner:

Set a 2½" diam. alum. cap in a 2½" X 30" alum. pipe at record distances from B.T.'s.. Cap mkd. per sketch. Raised stone mound. Set steel posts, 3'± E. & W. of Cor. with mon. and attn. signs attached.

T7S. R33E
1/4 $\frac{S31}{S6}$
RPLS 1910
1985

12" D.B.H. Douglas Fir, N. 2° E., 28.5', scribed 1/4S31BT. Set a brass washer mkd. RPLS 1910 btwn. B & T.

All B.T.'s. have B.T. tags, attn. signs and bands and faces painted red.

Declination; 18° 45' East.



C.J. MARTIN SURVEYING
2751 JUNIPER ST.
SWEET HOME, OR 97386

Office of Surveyor County of Grant
 State of Oregon, I hereby certify that the within instrument was filed in this office
 for record on the 13 day of aug, 1985
Robert D. Baggett by _____
 (COUNTY OFFICIAL) (DEPUTY)