


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

Corner established in 1882, by Eugene P. McCornack, Under General Land Office Contract No. 398. Surveyor Generals Notes State: Set basalt stone 16x10x10" 11" in the ground for corner to sections 3, 4, 33, and 34 marked with 3 notches on East & 1 notch on West edges, from which;

- A Pine 6" dia. bears N10°E, 92 lks dist. marked T7S R35½E S34 BT.
- A " 6" " " S10°E, 74 lks " " T8S " S3 BT.
- A " 10" " " S30°W, 59 lks " " " " S4 BT.
- A " 8" " " N20°W, 102 lks. " " T7S " S33 BT.

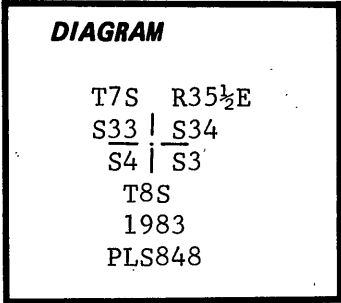


Description of corner evidence found:

Found a 12x6x6" stone with marks visible, lying next to a mound of stone. From which:
 Found dead 8" Lodge-pole Pine scribed T8S R35½E, S3 BT, bears S4°E, 48.5 ft.
 Found down Lodge-pole Pine scribed, bears S30°W, 39.0 ft.
 Found rotten footwads of NE and NW trees approximity conforming to record bearing and distance. Accepted stone as corner position.

Description of monument and accessories | established to perpetuate the original location of this corner:

Set a 30"x2½" aluminum pipe with a 2½" aluminum cap stamped as shown in diagram. Set on solid rock, set original stone alongside pipe and raised a mound of stone to top of pipe.
 From which:
 A Fir 10" dia. bears N20°W, 64.0 ft. scribed T7S R35½E S33 BT.
 A Lodge-pole Pine 5" dia. bears N30°E, 11.6 ft. scribed S34 BT.
 A " " " 8" " " S85°E, 18.6 ft. " T8S R35½E S3 BT.
 A " " " 5" " " S76°W, 31.5 ft. " S4 BT. Township 18 range omitted on 5" trees.
 Set steellpost with warning sign alongside pipe in the mound of stone.
 Nailed brass washers stamped PLS848, bearing tree and warning signs to each tree.
 Painted 6" red band around each tree.

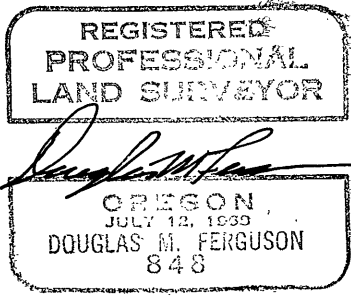

Corner monumented 8-30-83
 Witnessed by Dan Martin

Office of Surveyor County of Grant
 State of Oregon, I hereby certify that the within instrument was filed in this office
 for record on the 22 day of Nov, 1983
Robert D. Bight by _____
 (COUNTY OFFICIAL) (DEPUTY)