

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:


Corner established in 1882 by Eugene P. McCornack, Under General Land Office Contract No. 398. Surveyor Generals Notes State: Set a basalt stone 10x10x6" 7" in the ground for corner to sections 2, 3, 34, 35 marked with 2 notches on E and 2 notches on W edges.

From Which:

A Pine 10" dia., bears N50°E, 18 lks. dist. marked T7S R35½E S 35BT
 A " 6" " " S30°E, 24 " " " T8S " S 2 BT.
 A " 8" " " S75°W, 24 " " " " S3 BT.
 A " 8" " " N35°W, 27 " " " T7S " S34 BT.

In 1974 the B.L.M. found the original stone in place and set a 30"x2½" galvanized iron pipe with 3" brass cap at that position and scribed new bearing trees as follows:

A Spruce 11" dia. bears S80°E, 9 lks dist. scribed T8S R35½E S2 BT.
 A " 8" " " N68°E, 74 lks dist. " T7S R35½E S35 BT.

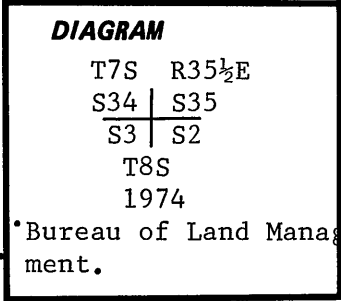

Description of corner evidence found:

Found brass cap monument stamped as shown on the diagram, well set in the ground, in good condition.

From Which:

An original bearing tree, a dead Lodge-pole Pine 11" dia. scribed R35½E S3 BT., bears S78°W, 16.4 ft. (record S75°W, 24 lks.) An original bearing tree, a dead Lodge-pole Pine scribed T7S R35½E S34 BT. N32°W, 18.2 ft. (record N35°W, 27 lks.) An original bearing tree, a dead Lodge-pole Pine scribed T8S R35½E S2 BT, bears S23°E, 14.2 ft. (record S30°E, 24 lks.) A bearing tree taken by B.L.M. a Spruce 11" dia. live in good condition, blaze healed, bears S80°E, 5.7 ft. (record S80°E 9 lks.) A bearing tree taken by B.L.M. a Spruce 8" dia. live in good condition with blaze healed over, bears N68°E, 48.4 ft. (record N68°E, 74 lks.)

Description of monument and accessories | established to perpetuate the original location of this corner:

I maintained the corner by setting a steel post with warning sign alongside the brass cap.

I scribed new bearing trees as follows:


A Spruce 13" dia., bears N52°W, 44.8 ft. scribed T7S R35½E S34 BT.
 A " 14" " " S87°W, 24.9 ft. " T8S " S3 BT.

Nailed brass washers stamped PLS848, bearing tree and warning signs to each tree.

Painted 6" red band around each tree.

Corner monumented 8-31-83

Witnessed by Dan Martin

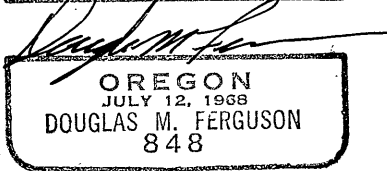

Office of Surveyor County of Grant
 State of Oregon, I hereby certify that the within instrument was filed in this office
 for record on the 22 day of Nov, 1983
Robert O. Burnett by _____
 (COUNTY OFFICIAL) (DEPUTY)