


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

History of original corner establishment:

None

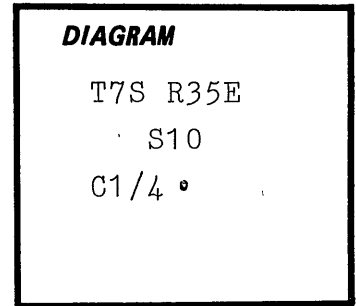

Description of corner evidence found:

None

This corner was established as part of a subdivisional section breakdown survey, marking property boundaries between U. S. Forest Service and private parcels.

Description of monument and accessories I established to perpetuate the

original location of this corner:

Set: A 2½ in. by 30 in. aluminum pipe, with a 2½ in. aluminum cap, 12 in. in the ground with a mound of stone to the cap, from which:

- A 6 in. dia. Lodgepole Pine bears N12½°W - 17.3 ft., scribed: C1/4 S10 BT
- A 14 3/4 in. dia. Tamarack bears N83½°E - 56.8 ft., scribed: C1/4 S10 BT

Each new bearing tree has a brass washer stamped PLS 1106 nailed to the face of the blaze, and has 54-3 and 54-9 signs attached. Painted the face of the blaze and a 6 in. band around each bearing tree red.

Set a steel fence post, with 54-9 sign attached, South of the monument.

Used a steel tape and a magnetic staff compass, with 20° East declination. Measured to the center of the bearing trees.

This corner was monumented on September 27, 1983.

Witnessed by: Robert D. English  
Eric Giesler

REGISTERED PROFESSIONAL LAND SURVEYOR
---

*William R. Wells*

OREGON JULY 22, 1977 WILLIAM R. WELLS 1106
---

Cap marked:

T7S R35E
S10
C1/4 •
1983
PLS 1106

Office of...County...Surveyor..... County of...Grant.....  
 State of...Oregon....., I hereby certify that the within instrument was filed in this office  
 for record on the...15...day of...Oct....., 1983.....  
*Robert D. English* by .....  
 (COUNTY OFFICIAL) (DEPUTY)