

**CERTIFIED RECORD OF LAND CORNER MONUMENTATION**

**History of original corner establishment:**

Corner established by Herman D. Gradon, under contract No. 499 dated March, 1884.

The original notes state that at the corner:

A 18 in. by 18 in. by 8 in. Granite stone (marked), set 12 in. in the ground for the corner, from which:

A 8 in. dia. Pine bears N53°E - 24 lks (15.8 ft.) marked: T7S R35E S11 BT

A 12 in. dia. Pine bears S35°E - 34 lks (22.4 ft.) marked: T7S R35E S14 BT

A 10 in. dia. Pine bears S59°W - 20 lks (13.2 ft.), marked: T7S R35E S15 BT

A 10 in. dia. Pine bears N23°W - 82 lks (54.1 ft.), marked: T7S R35E S10 BT

No record of subsequent remonumentation was found in County records.


**Description of corner evidence found:**

An 18 in. by 18 in. by 18 in. Granite stone, from which:

A fallen decayed Pine bears N53°E - 24 lks (15.8 ft.) with visible scribing.

A fallen decayed Pine bears S41°E - 34 lks (22.4 ft.) with visible scribing.

A fallen decayed Pine bears S66°W - 20 lks (13.2 ft.) with visible scribing.

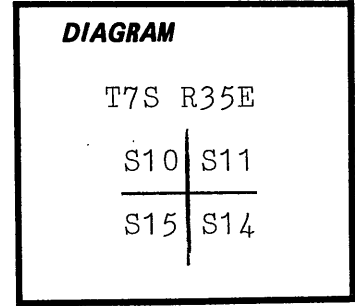

**Description of monument and accessories established to perpetuate the original location of this corner:**

Set: A 2½ in. by 30 in. aluminum pipe, with a 2½ in. aluminum cap, 18 in. in the ground with a mound of stone to the cap, from which:

A 9 in. dia. Lodgepole Pine bears N44°E - 47.7 ft., scribed: T7S R35E S11 BT

A 9½ in. dia. Lodgepole Pine bears S31°E - 83.9 ft., scribed: T7S R35E S14 BT

A 7 in. dia. Lodgepole Pine bears S63°W - 56.0 ft., scribed: T7S R35E S15 BT

A 8 in. dia. Lodgepole Pine bears N39°W - 6.9 ft., scribed: T7S R35E S10 BT

Each new bearing tree has a brass washer stamped PLS 1106 nailed to the face of the blaze, and has 54-3 and 54-4 signs attached. Painted the face of the blaze and a 6 in. band around each bearing tree red.

Set a steel fence post, with 54-2 and 54-4 signs attached, East of the monument. Used a steel tape and a magnetic staff compass, with 20° East declination. Measured to the center of the bearing trees.

This corner was monumented on September 12, 1983.


Witnessed by: Robert D. English  
Aaron C. Hoefl

REGISTERED PROFESSIONAL LAND SURVEYOR
---

*William R. Wells*

OREGON JULY 22, 1977 WILLIAM R. WELLS 1106
---

Cap marked:

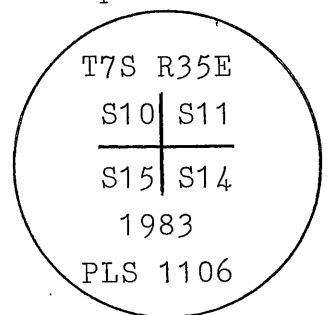

Office of.....County Surveyor..... County of.....Grant.....  
Oregon  
State of....., I hereby certify that the within instrument was filed in this office  
for record on the 15 day of Oct, 1983.  
*Robert D. English* by .....  
(COUNTY OFFICIAL) (DEPUTY)