


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

J-21

History of original corner establishment:

1884, Herman D. Gradon, under contract No. 499, established the corner.
 He set a post 4' long & 4" square, 24" in the ground, from which:
 15" Pine bears, N. 30° E., 37 lks.
 8" Pine bears, S. 88° E., 20 lks.
 8" Pine bears, S. 44° W., 11 lks.
 10" Pine bears, N. 30° W., 19 lks.
 1983, William R. Wells, Registered Land Surveyor No. 1106, in Grant County
 Map Survey No. 836, found:
 14" Pine snag bears, S. 88° E., 20 lks., with partially open blaze.
 10 1/2" Pine snag bears, N. 30° W., 19 lks., with open blaze and visible scribing.
 Using distance-distance intersection from the found BT's, He reset the corner using a 2 1/2" by 30"
 aluminum pipe, with 2 1/2" aluminum cap, set 26" in the ground with a mound of stone to the cap, from which:
 12" Lodgepole Pine bears, N. 55° E., 124.6 feet.
 16" Lodgepole Pine bears, N. 80 1/2° W., 83.7 feet.
 Reference monument, 1 1/2" aluminum cap on 5/8" rebar, bears S. 46° W., 12.00 feet.
 Reference monument, 1 1/2" aluminum cap on 5/8" rebar, bears S. 17 1/2° E., 12.00 feet.
 Description of corner evidence found:

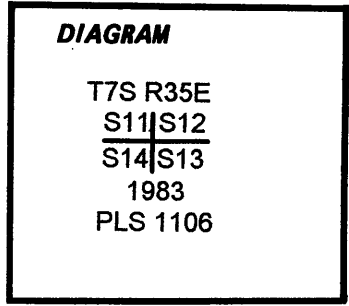


Found a 2 1/2" aluminum pipe, with 2 1/2" aluminum cap, projecting 1" out of a 2' diameter ring of stone,
 from which:

- 13" Lodgepole Pine bears, N. 53 1/2° E., 124.6 feet, with scribing "T7S R35E S12 BT" visible on single blaze.
- 13" downed Lodgepole Pine snag bears, S. 88° E., 13.2 feet, scribing visible on chopped open blaze (original BT).
- 18" Lodgepole Pine bears, N. 80 1/2° W., 82.3 feet, with scribing "T7S R35E S11 BT" visible on signal blaze.
- 10" Lodgepole Pine snag bears, N. 31 3/4° W., 12.9 feet, scribing "T7S R35E S11 BT" visible on partially healed blaze (original BT).
- 1 1/2" aluminum cap on 5/8" rebar, set flush with the ground, bears S. 20°23' E., 12.04 feet, marked "S13 12.00 FT 1106", with arrow pointing toward the corner.
- 1 1/2" aluminum cap on 5/8" rebar, projecting 1" out of ground, bears S. 42°45' W., 12.04 feet, marked "S14 12.00 FT 1106", with arrow pointing toward the corner.

Description of monument and accessories I established to perpetuate the original location of this corner:

Magnetic Declination: 20° East

Work performed by: David A. Schlaich (RLS 2308)
 Date: October 1993

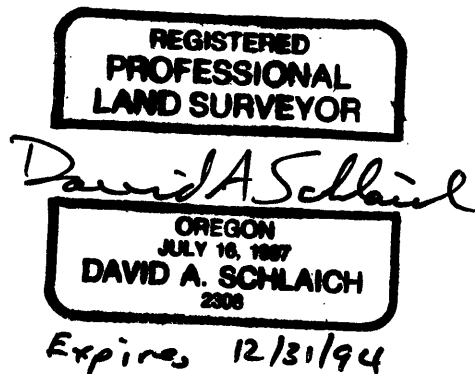

Office of.....Surveyor..... County of.....Grant.....
 State of.....Oregon....., I hereby certify that the within instrument was filed in this office
 for record on the.....2 day of.....Feb....., 19..94
Robert D. Baggett by.....
 (COUNTY OFFICIAL) (DEPUTY)

J-21

SEE MBS 1307