

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

M-23


History of original corner establishment:

1983, William R. Wells, PLS 1106, established this corner when he subdivided section 13 (Grant County Map Survey No. 836).

Wells set at the corner a 2 1/2" by 30" aluminum pipe, with a 2 1/2" aluminum cap, 26" in the ground with a mound of stone to the cap, from which:

9" Lodgepole Pine bears, S. 87° W., 108.3 feet.

9" Lodgepole Pine bears, N. 46° W., 121.2 feet.

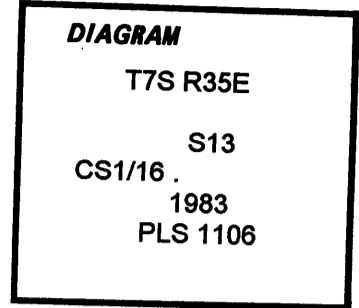

Description of corner evidence found:

Found a 2 1/2" aluminum pipe with 2 1/2" aluminum cap, projecting 1" out of a ring of rock 2 foot in diameter, from which:

13" Lodgepole Pine bears, N. 47 1/2° W., 121.2 feet, scribing "CS1/16 S13 BT" visible on a partially healed blaze.

12" Lodgepole Pine bears, S. 84 1/2° W., 108.3 feet, scribing "CS1/16 S13 BT" visible on a partially healed blaze.

Both BT's have a 3/4" brass washer stamped "PLS 1106" nailed into the lower circle of the scribed "B".

Description of monument and accessories I established to perpetuate the original location of this corner:

REGISTERED
PROFESSIONAL
LAND SURVEYOR

David A Schlaich

OREGON
JULY 18, 1967
DAVID A. SCHLAICH
2308

Expires 12/31/94

Magnetic Declination: 20° East

Work performed by: David A. Schlaich (RLS 2308)
Date: October 1993

Office of Surveyor County of Grant
State of Oregon, I hereby certify that the within instrument was filed in this office
for record on the 2 day of Feb, 1994
Robert D. Baggett by _____
(COUNTY OFFICIAL) (DEPUTY)