

CERTIFIED RECORD OF LAND CORNER MONUMENTATION

**History of original corner establishment:**

None

**DIAGRAM**

T7S R35E

S24

C 1/4 •

**Description of corner evidence found:**

None

This corner was established as part of a subdivisional section breakdown survey, marking property boundaries between U. S. Forest Service and private parcels.

**Description of monument and accessories I established to perpetuate the original location of this corner:**

Set: A 2½ in. by 30 in. aluminum pipe, with a 2½ in. aluminum cap, 25 in. in the ground with a mound of earth to the cap, from which:

A 7½ in. dia. Lodgepole Pine bears S37½°W - 35.3 ft., scribed:  
C 1/4 S24 BT

A 7 in. dia. Lodgepole Pine bears N26°W - 58.8 ft., scribed:  
C 1/4 S24 BT


Each new bearing tree has a brass washer stamped PLS 1106 nailed to the face of the blaze, and has 54-3 and 54-9 signs attached. Painted the face of the blaze and a 6 in. band around each bearing tree red.

Set steel fence posts (A) North of the monument with 54-2 and 54-9 signs attached, and (B) East of the monument with a 54-2 sign attached.


Used a steel tape and a magnetic staff compass, with 20° East declination. Measured to the center of the bearing trees.

This corner was monumented on September 14, 1983.

Witnessed by: Robert D. English  
Aaron C. Hoelt

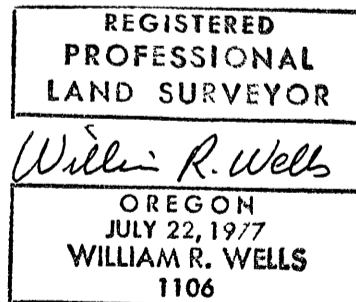

Cap marked:

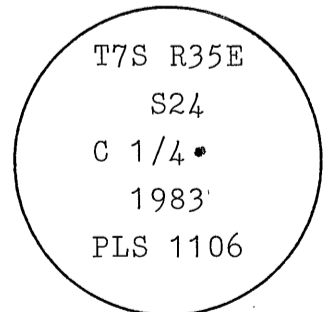

Office of..... County Surveyor..... County of..... Grant.....  
State of..... Oregon..... I hereby certify that the within instrument was filed in this office  
for record on the 15 day of OCT 1984  
*Robert D. English* by.....  
(COUNTY OFFICIAL) (DEPUTY)