


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

**History of original corner establishment:**

Corner originally established by Alonzo Gesner under GLO contract number 266 dated June 20, 1877. Surveyor General record states:

Set stone 15x10x10 for 1/4 Sec Cor from which:

- A red fir 10 in. in dia bears N88°E 53 lks dist
- A tamarack 4 in. in dia bears N35°W 20 lks dist

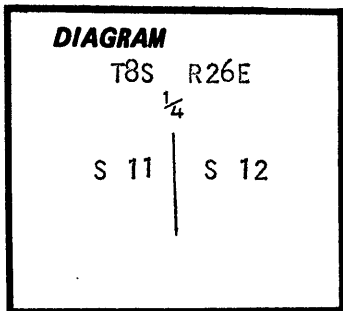

**Description of corner evidence found:**

Found stone of called size marked 1/4 in mound of stone

Found a 21 inch diameter red fir N88°E, 35.0 feet, dead and down, blaze evident

No evidence of original Northwest bearing tree

**Description of monument and accessories I established to perpetuate the**


**original location of this corner:** In place of stone, I set a 2 1/2" x 30" aluminum pipe with aluminum cap marked as shown, 29 inches in the ground from which:

New BTs

- A 11 inch diameter tamarack bears S73°E, 54.4 feet marked 1/4 S12 BT
- A 20 inch diameter P.Pine bears N77°W, 56.7 feet marked 1/4 S11 BT

- Raised mound of stone around monument
- Buried original stone North and alongside monument
- Set steel fence post approximately 5 feet North of monument with 54-4 sign attached

Corner set May 26, 1984  
Witnesses: Greg Blackman and Rick Robinson  
See map of survey dated June, 1984

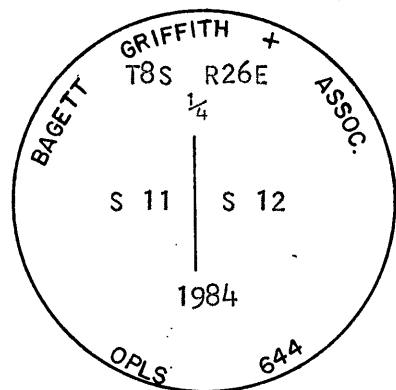

I used a steel tape and magnetic compass in the establishment of these accessories. I used 20° East magnetic declination. The distance to the new bearing trees are to the center of the tree. I painted a 6 inch red band around all bearing trees and attached 54-4 and 54-3 signs. I placed a brass washer marked OPLS 644 by the BT blaze on new bearing trees.

Office of Surveyor County of Grant  
 State of Oregon, I hereby certify that the within instrument was filed in this office  
 for record on the 15 day of August, 1984  
[Signature] by [Signature]  
 (COUNTY OFFICIAL) (DEPUTY)