


CERTIFIED RECORD OF LAND CORNER MONUMENTATION

**History of original corner establishment:**

Corner originally established by Alonzo Gesner under GLO contract number 266 dated June 20, 1877. Surveyor General record states:

Set stone 24x18x7 for 1/4 Sec Cor

Raised stone mound at Cor.

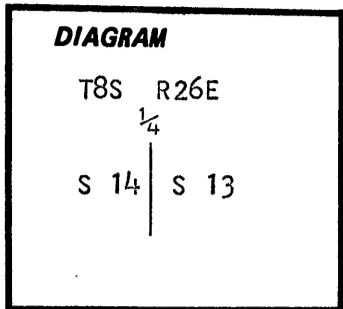

**Description of corner evidence found:**

Found stone 28x16x7 marked 1/4 in small mound of stone

**Description of monument and accessories I established to perpetuate the**

**original location of this corner:** In place of stone, I set a 2 1/2 inch x 30 inch aluminum pipe with aluminum cap marked as shown, 20 inches in the ground, from which:

New BTs

A 20 inch diameter P.Pine bears S83°E, 35.0 feet marked 1/4 S13 BT

A 12 inch diameter Juniper bears S22°W, 21.8 feet marked 1/4 S14 BT

Raised mound of stone around monument


Buried original stone South and alongside of monument

Set steel fence post approximately 5 feet North of monument with 54-4 sign attached

Corner set May 25, 1984

Witness: Rick Robinson

See map of survey dated June, 1984

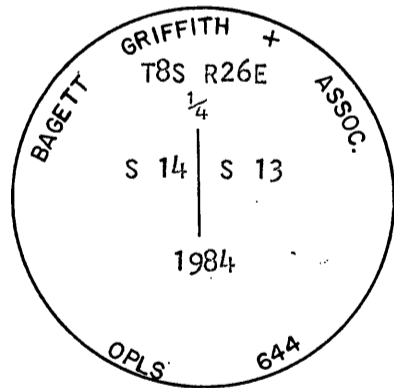

**REGISTERED PROFESSIONAL LAND SURVEYOR**

*Duane I. Griffith*

OREGON  
 JULY 10, 1984  
**DUANE I. GRIFFITH**  
 644

I used a steel tape and magnetic compass in the establishment of these accessories. I used 20° East magnetic declination. The distance to the new bearing trees are to the center of the tree. I painted a 6 inch red band around all bearing trees and attached 54-4 and 54-3 signs. I placed a brass washer marked OPLS 644 by the BT blaze on new bearing trees.

Office of... Surveyor ... County of... Grant ...  
 State of... Oregon ... I hereby certify that the within instrument was filed in this office  
 for record on the... 15 day of... August ... 1984  
 ... Robert D. Baggett ... by ...  
 (COUNTY OFFICIAL) (DEPUTY)