

# CERTIFIED RECORD OF LAND CORNER MONUMENTATION

## History of original corner establishment:

None previously established.  
See Record Map of Survey No. 2026

N-2

### DIAGRAM

W  $\frac{1}{16}$       S18  
                     S19


PLS 2645  
2014

## Description of corner evidence found:

Not Applicable

## Description of monument and accessories I established to perpetuate the original location of this corner:

Set a 3" x 30" aluminum pipe with a 3 1/4" aluminum cap marked as shown in a 3' diameter mound of stone, . A magnet in a clear plastic case was deposited at the base of pipe. Cap is 2 1/2" above the mound of stone.

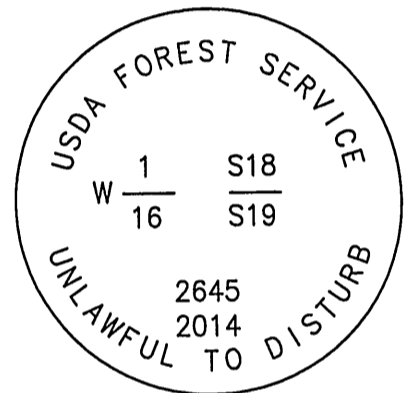

## New accessories:

A 1/2" x 30" rebar with an aluminum cap marked "RM1" bears N12°01'E, 37.6'.  
A 1/2" x 30" rebar with an aluminum cap marked "RM2" bears S35°24'E, 36.8'.

## Geodetic Coordinates (NAD83):

N 44°51'58.4"

W 119°39'59.5"

Geodetic coordinates were obtained from a Garmin recreational grade GPS receiver.

Date: September 9, 2014

Bearings to accessories are Geodetic.

Witnesses: Daniel Lee, Robert Flora, Paul Guglielmelli and Torribio Quinones

REGISTERED  
PROFESSIONAL  
LAND SURVEYOR

  
OREGON  
JANUARY 18, 1994  
MARK A. LICHTENTHALER  
2645

EXPIRES 12-31-2018